

Reach-in Refrigerators & Freezers

Q Series

- QR-1 • QR-2 • QR-1G • QR-2G
- QF-1 • QF-2 • QDT-2



Item # _____

Standard Features

- Our new “Q” series of smart reach-ins are designed for efficiency and performance unlike any other of its class.
- “Advance” digital controller with: Eco function, Rapid pull down, Evaporator coil ice detection, Condenser cleaning, Door alarm and adjustable defrost. Optional: HACCP capability.
- IPX 5 for complete water protection to controls and refrigeration system.
- Top mount refrigeration system outside the chamber for hygiene and increased capacity.
- Air distribution channel for uniform temperature throughout the cabinet.
- High quality 304 stainless steel interior and exterior construction with embossed rack support for a clean & safe food environment. Coved corner floor to meet NSF requirements.
- Heavy duty stainless steel door with full length recessed door handles; interior step design for added insulation and protection of door gasket.
- Refrigerators maintain product temperatures from 28° to 46°F. Freezers from -8°F to 0°F. Includes automatic defrost for the best temperatures in food preparation.
- 2-3/8” CFC-Free polyurethane insulation; foamed in place including our mullions on double doors for added strength and energy efficiency.
- Accepts all basic pan sizes including 18” x 26” bun pans.
- LED interior lights, locks and castors standard.
- Field reversible doors



QR(F)-1



QR(F)-2



QR-1G



Embossed 304 S/S shown



Options & Accessories

- 6” adjustable legs (set of 4)
- Epoxy coated shelves
- 220 volts / 50 cycles / 1 phase
- HACCP system



*Conforms to UL & NSF-7 standards

	Model	Door	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions			Shipping	
										W	D	H	(Wt. / Cubes)	(Wt. / Cubes)
Refrigerator	QR-1	1	21	3	3.7	1/4	115/60/1	5-15P	8'	25-3/4" (653 mm)	31-1/2" (796 mm)	73-3/4" (1873 mm)	259 (131.5 kg)	35 (0.99m ³)
	QR-1G	1	21	3	3.7	1/4	115/60/1	5-15P	8'	25-3/4" (653 mm)	31-1/2" (796 mm)	73-3/4" (1873 mm)	278 (136.1 kg)	35 (0.99m ³)
	QR-2	2	44	6	5.6	1/3	115/60/1	5-15P	8'	51-7/8" (1318 mm)	31-1/2" (796 mm)	73-3/4" (1873 mm)	412 (179.2 kg)	70 (1.98 m ³)
	QR-2G	2	44	6	5.6	1/3	115/60/1	5-15P	8'	51-7/8" (1318 mm)	31-1/2" (796 mm)	73-3/4" (1873 mm)	451 (188.3kg)	70 (1.98m ³)
Dual Freezer	QF-1	1	21	3	8.5	3/4	115/60/1	5-15P	8'	25-3/4" (653 mm)	31-1/2" (796 mm)	73-3/4" (1873 mm)	273 (131.5 kg)	35 (0.99 m ³)
	QF-2	2	44	6	12.1	1	115/60/1	5-15P	8'	51-7/8" (1320.8 mm)	31-1/2" (796 mm)	73-3/4" (1873 mm)	395 (179.2 kg)	70 (1.98 m ³)
	QDT-2	2	44	6	3.7 - 8.2	1/4 - 1/3	2x115	5-15P	8'	51-7/8" (1318 mm)	31-1/2" (796 mm)	73-3/4" (1873 mm)	544 (179.2 kg)	70 (1.98 m ³)

Specifications Q Series

Construction

Heavy duty 304 stainless steel exterior front and sides. Interior completely constructed of heavy duty 304 stainless steel with S/S embossed rack support system and covered cornered floor. Door is heavy duty stainless steel exterior and stainless steel interior, step design with stainless steel hinged solid doors and positive seal. Provided with locks per section, magnetic door gaskets, removable without tools, self-closing and with 90° stay open feature. Recessed full length door handle. Door openings have a plastic breaker strips to retard condensate formation. Glass door units have a dual pane glass, thermal insulated with heavy duty aluminum frame and door handle. Unit comes complete with a 2-3/8" CFC-Free polyurethane insulation, foamed in place. Air distribution channel on both single and double

door models. Interior LED light with safety shield per section outside the food zone and activated by door rocker switch.

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134A refrigerator / R-404A freezers). Top mount condensing unit located outside the chamber for easy access and greater capacity. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 28° F to 46°F and freezers -8°F to 0°F during normal operations. "Advance" digital controller/display features self-

diagnosis system, ECO function, and pull-down system. IPX5 water-proof protection and optional HACCP system. Automatic defrost.

Shelving


(3) Epoxy coated shelving per door with channel slides for supports. Adjustable in 2" increments per shelf.

Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p). Standard 5" diameter casters, front 2 with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

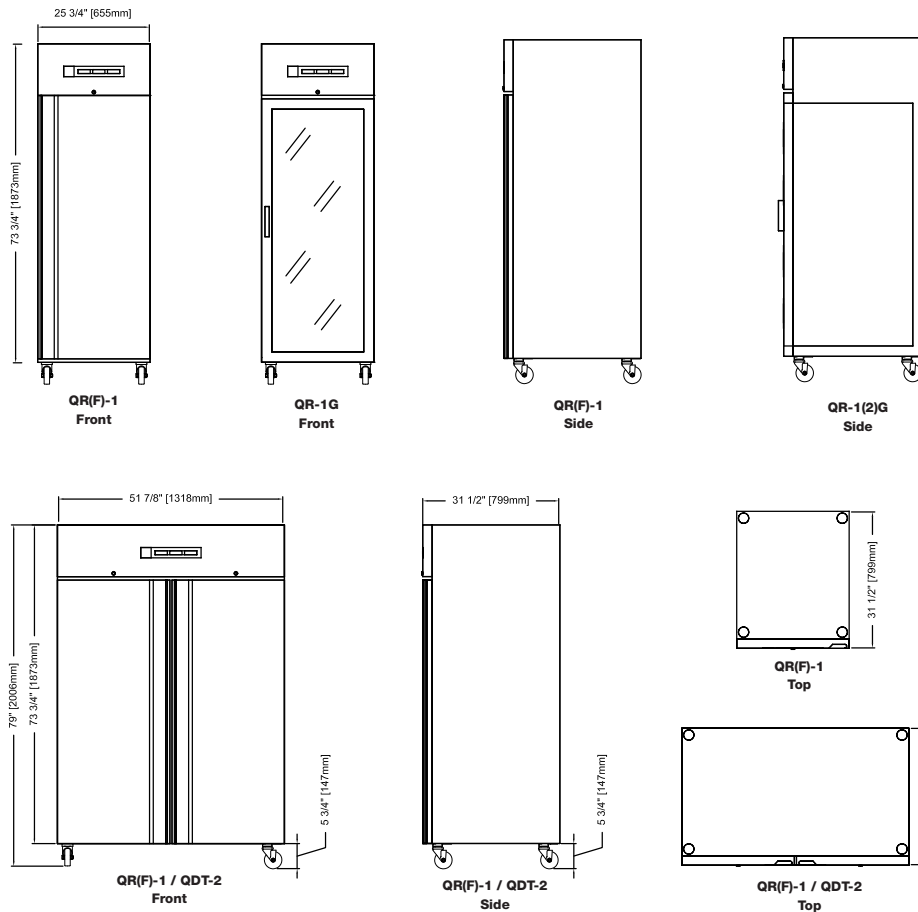

The manufacturer reserves the rights to modify materials and specifications without notice.

