

# DRYING

## STACK DRYERS ADVANCE FD2-25 TP2



### FEATURES

#### TP2

- 7" touchscreen, user friendly and totally programmable.
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 Languages.
- 8 dosing signals.

#### OUTSTANDING FEATURES

- Reversing drum action is standard.
- Galvanized drum is standard.
- Frequency inverter is standard.

#### EFFICIENCY

- MIXED FLOW - mixed axial-radial airflow.

#### VERSATILITY

- Make to order - customization.
- Wet Cleaning configuration.
- OPL > COIN - Standard OPL model easily transformable to coin laundry uses.

#### CONNECTIVITY

- Standard IoT FagorKconnect.
- Management of laundries: OPL and COIN.

#### ERGONOMICS

- Lint Filter Drawer, stainless steel mesh.
- Large Loading Doors.

#### MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics for technicians.

#### OTHERS


- Grey skinplate outer casing, stainless steel look.
- SOFT TOUCH - drum with stamped holes.
- COOL DOWN - anti-wrinkle at the end of the cycle.
- Heating options: natural gas and propane
- CE approved.

#### OPTIONS

- iDRY - Intelligent humidity control. Temperature probe at drum inlet.
- Double door glass.
- FK - Integrated Fire Extinguishing System.
- Tropicalized model.
- Opposite door opening.
- Dosing-spraying.
- Back panel external air + filter.
- Lint filter with grid 0,01 In (standard in STACK is 0,02 In) .
- Stainless steel front and side panels.
- Stainless steel frontal panel.


CAPACITY		U.	FD-2-25 TP2
Capacity 1/18	Kg		11.7 x 2
	Lb		25.7 x 2
Capacity 1/20	Kg		10.5 x 2
	Lb		23.1 x 2
DRUM			
Ø Drum	mm		750
	inch		29.53
Drum length	mm		475
	inch		18.7
Drum volume	l cu		210
	ft		7.41
Ø Door	mm		574
	inch		22.6
Floor to door center	mm		547 / 1522
	inch		21.54 / 59.92
Floor to lower part of the door	mm		189 / 1164
	inch		7.32 / 45.83
Drum motor power	kW		0.37 x 2
ELECTRIC POWER			
Installed heating power	Kw		12 x 2
Installed electrical power	Kw		25.34
Evaporation capacity	l/h		15.8
	USgallon/h		4.17
Hourly output	Kg/h		31.6
	Lb/h		69.7
GAS POWER			
Installed heating power gas Installed	kcal/h		10327 x 2
	Btu/h		40945.7 x 2
heating power gas	kW		12 x 2
Installed electrical power	Kw		1.34
Instant propane gas consumption (G31)	Kg/h		1.03 x 2
	Lb/h		2.27 x 2
Instant natural gas consumption (G20)	m³/h		1.27 x 2
	cfm		0.75 x2
Evaporation capacity	l/h		15.3
	USgallon/h		4.042
Hourly output Ø	Kg/h		30.6
	Lb/h		67.5
Gas inlet	BSPP ISO 228-1		1/2"
VENTILATION			
Nominal air flow	m³/h		500 x 2
	cfm		294.28 x 2
Air outlet Ø	mm		200
	inch		7.87
Fan motor power	kW		0.25 x 2
HEAT DISSIPATION			
Total max heat dissipation	kW		2.4
	Btu/h		8193.9
Front panel max heat dissipation	kW		1.68
	Btu/h		5735.8
CONNECTIONS		ELECTRICAL	GAS
Voltage 120/60/1~ I + G	Nº x AWG / A	-	2.5 X 14 /20 A
Voltage 230V - 3~ + G	-	-	-
Voltage 480V - 3~ + G	-	-	-

DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	785 / 865
	inch	30.91 / 34.06
Net depth / Gross depth	mm	972 / 1055
	inch	38.27 / 41.54
Net height / Gross height	mm	1980 / 2126
	inch	77.95 / 83.70
Net weight / Gross weight	Kg	260 / 268
	Lb	573.2 / 590.84
OTHERS		
Sound level	dB	64

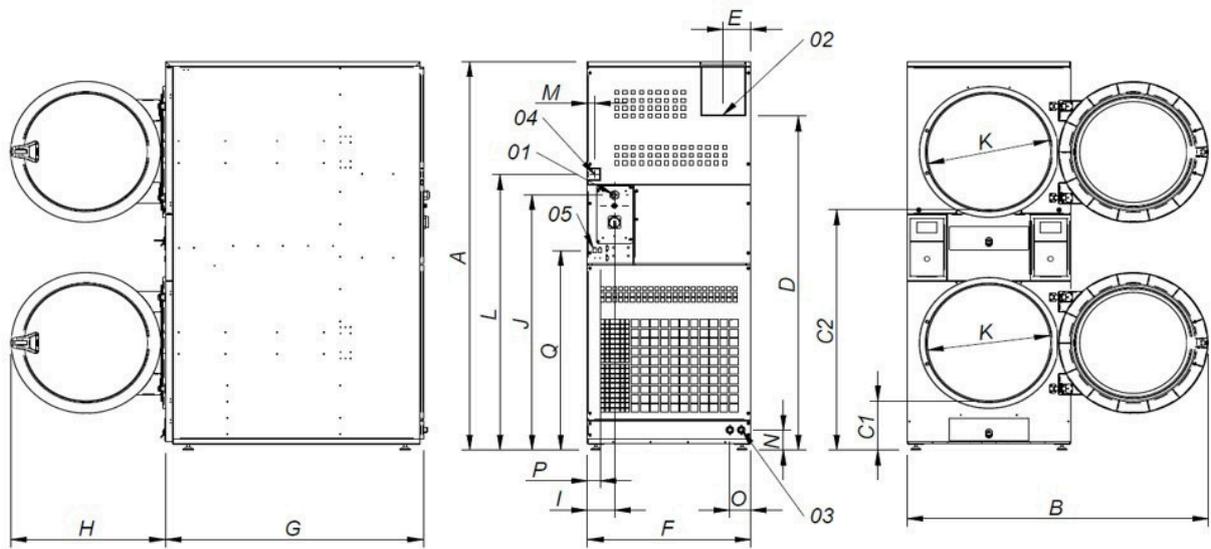

- 01. Power supply
- 02. Fumes output Ø200
- 03. 2 Sprinkler valves 3/4"
- 04. Gas inlet 1/2"
- 05. Ethernet connection

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
FD-2-25 TP2	77.95	56.96	10.19	48.58	66.14	5.31	30.90	39.26	28.93	5.11	50.19	22.63	55.35	1.37	4.05	3.93	2.36	40.07



# DRYING

## FD-2-35 TP2 ADVANCE STACK DRYERS



Fagor commercial dryers are perfect for laundromats, hotels, hospitals, nursing homes, and more.

You'll see a reduction in energy consumption, better drying results, and longer garment/linen life.

### TOUCH PLUS CONTROL

- 7" touchscreen, intuitive and flexible programming
- USB Connection: software free of charge
- 37 languages, continually expanded
- Upload videos to display, use for ads, instructions, etc.

### CONNECTIVITY

- FagorKconnect - IoT
- Provided at NO extra charge
- Manage your laundry anywhere, at anytime, 24/7
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and much more.

### EFFICIENCY

- Reversing drum action, standard
- Optimized, mixed airflow
- Frequency inverter standard

### VERSATILITY

- Easily converts from OPL to COIN
- Wetcleaning ready, programmable

### ERGONOMICS

- Large doors, easy loading, unloading
- Stainless steel mesh lint filter

### MAINTENANCE

- Hinged front control panel, easy and ergonomic access
- Technical menu, statistics for technicians
- Common parts across all models


### MORE INFO

- Grey skin plate outer casing, stainless look
- Stainless steel drum
- Drum with stamped holes
- Anti-wrinkle at end of cycle
- CE Approved

### OPTIONS


- FagorKconnect at no extra charge
- Dosing/spray system
- Integrated Fire Extinguishing System
- iDry - Intelligent humidity control. Temperature probe at drum inlet.
- Back panel external air + filter
- Lint filter with various grids
- Stainless steel front and side panels
- Reversible door
- Heating options, natural gas and propane
- Tropicalized model
- Coin/token kit

DRUM		FD-2-35 TP2
Capacity 1/18	lb / kg	40.3 x 2 / 18.3 x 2
Capacity 1/20	lb / Kg	36.4 x 2 / 16.5 x 2
Drum Diameter	inch / mm	29.53 / 750
Drum Depth	inch / mm	29.37 / 746
Drum Volume	cu ft / L	11.65 / 330
Door Opening	inch / mm	22.63 / 575
Floor to lower part of the door	Top Pocket - inch / mm	48.6 / 1234
	Bottom Pocket - inch / mm	10.2 / 259
Drum motor power	HP / kW	.5 x 2 / 0.37 x 2
GAS POWER		
Installed heating power gas	Btu/h	40945.7 x 2
Evaporation capacity	US gallon/h / liters/hr	4.755 / 18
Gas inlet	BSP ISO 228-1	1/2"
VENTILATION		
Normal air flow	cfm / m3/h	294.28 x 2 / 500 x 2
Vent size	inch / mm	1 x 8 / 1 x 200
Fan motor power	HP / kW	.34 x 2 / 0.25 x 2
CONNECTIONS		GAS
Voltage 120/60/1~ I + G	N° x AWG / A	2.5 X 12 / 20A
Voltage 230V - 3~ + G		
Voltage 480V - 3~ + G		
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	inch / mm	30.91 / 34.06 / 785 / 865
Net depth / Gross depth	inch / mm	48.9 / 52.17 / 1242 / 1325
Net height / Gross height	inch / mm	78 / 83.7 / 1980 / 2126
Net weight / Gross weight	lb / Kg	639.2 / 698.87 / 290 / 317

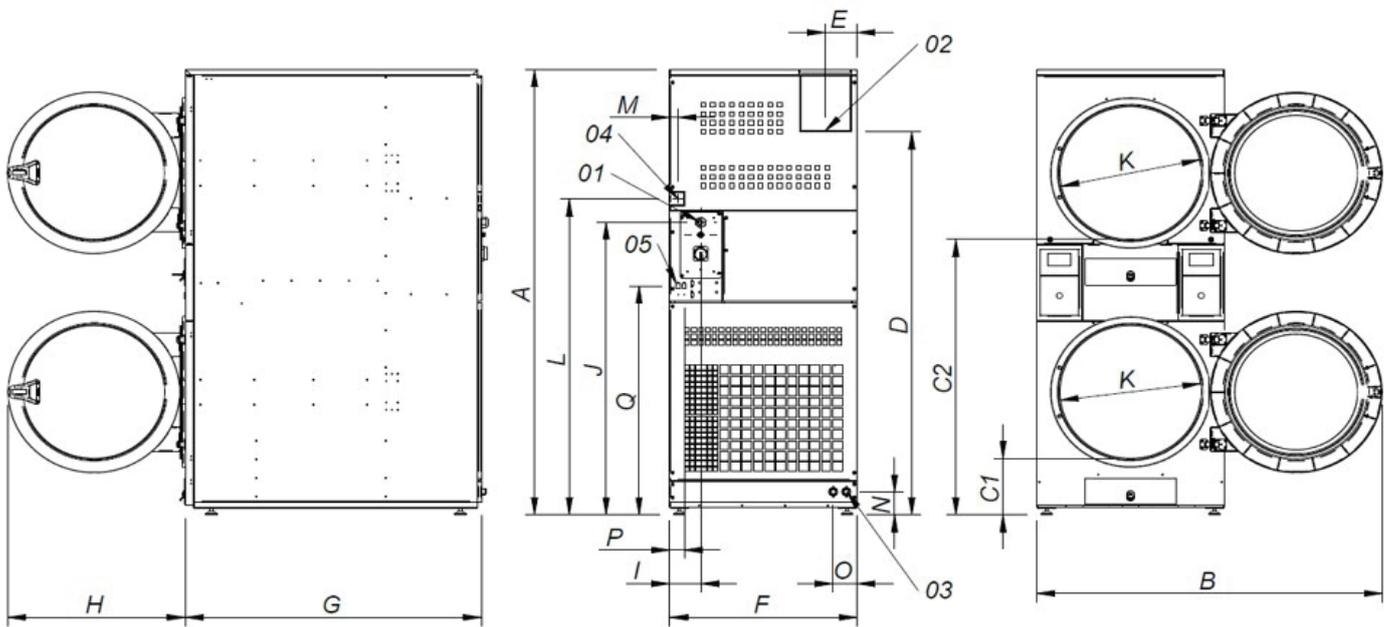

- 01. Power supply
- 02. Vent size 1x8 / 1x200
- 03. 2 Sprinkler valves 3/4"
- 04. Gas inlet 1/2"
- 05. Ethernet connection

Inches	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
FD-2-35 TP2	78	57	10.2	48.6	63.8	5.31	30.9	48.89	28.93	5.11	50.19	22.63	55.7	1.4	4.05	3.93	2.36	40.07



# DRYING

## FD-2-35 TP2 XP ADVANCE STACK DRYERS



Fagor commercial dryers are perfect for laundromats, hotels, hospitals, nursing homes, and more.

### TOUCH PLUS CONTROL

- 7" touchscreen, intuitive and flexible programming
- USB Connection: software free of charge
- 37 languages, continually expanded
- Upload videos to display, use for ads, instructions, etc.

### CONNECTIVITY

- FagorKonnnect - IoT
- Provided at NO extra charge
- Manage your laundry anywhere, at anytime, 24/7
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and much more.

### EFFICIENCY

- 75,000 BTUs for fast drying
- 120V-Reversing cylinder, standard
- Optimized, mixed airflow
- Frequency inverter driver, standard

### VERSATILITY

- Easily converts from OPL to COIN
- Wetcleaning ready, programmable

### ERGONOMICS

- Large doors, easy loading, unloading
- Stainless steel mesh lint filter

### MAINTENANCE

- Hinged front control panel, easy and ergonomic access
- Technical menu, statistics for technicians
- Common parts across all models

### MORE INFO


- Grey skin plate front and side panels, stainless look, standard
- Stainless steel drum, standard
- Soft touch hole design in dryer cylinder
- Anti-wrinkle at end of cycle
- ETL Approved

The XP dryer is a new generation in the Advance range. Now with 75,000 BTUs and i-Dry capable, the XP dryer is designed for easier maintenance, faster drying, and superior performance.

### OPTIONS


- Integrated Fire Extinguishing System
- Dosing/spray system
- iDry - Intelligent humidity control with auto-dry capability (coin and OPL)
- Lint filter with various grids
- Stainless steel front panels
- Reversible door
- Heating options, natural gas and propane
- Tropicalized model
- Coin/token kit, Central Pay and Card ready

DRUM		FD-2-35 TP2 XP
Capacity 1/18	lb / kg	40.4 x 2 / 18.3 x 2
Capacity 1/20	lb / Kg	36.3 x 2 / 16.5 x 2
Drum Diameter	inch / mm	29.53 / 750
Drum Depth	inch / mm	29.37 / 746
Drum Volume	cu ft / L	11.64 / 330
Door Opening	inch / mm	22.63 / 574
Floor to lower part of the door	Top Pocket - inch / mm	48 / 1234
	Bottom Pocket - inch / mm	9 5/8 / 259
Drum motor power	HP / kW	.5 x 2 / 0.37 x 2
GAS POWER		
Installed heating power gas	Btu/h	75,000 x 2
Evaporation capacity	US gallon/h / liters/hr	4.22 x 2 / 16 x 2
Gas inlet	BSPF ISO 228-1	3/4"
VENTILATION		
Normal air flow	cfm / m3/h	500 x 2 / 294.28 x 2
Vent size	inch / mm	8" / 200
Fan motor power	HP / kW	.34 x 2 / 0.25 x 2
CONNECTIONS		
Voltage 120/60/1~ I + G	N° x AWG / A	3 X 12 / 20A
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	inch / mm	30.9 / 34.1 / 785 / 865
Net depth / Gross depth	inch / mm	50 / 53.3 / 1270 / 1354
Net height / Gross height	inch / mm	78 / 83.7 / 1981 / 2126
Net weight / Gross weight	lb	692 / 725

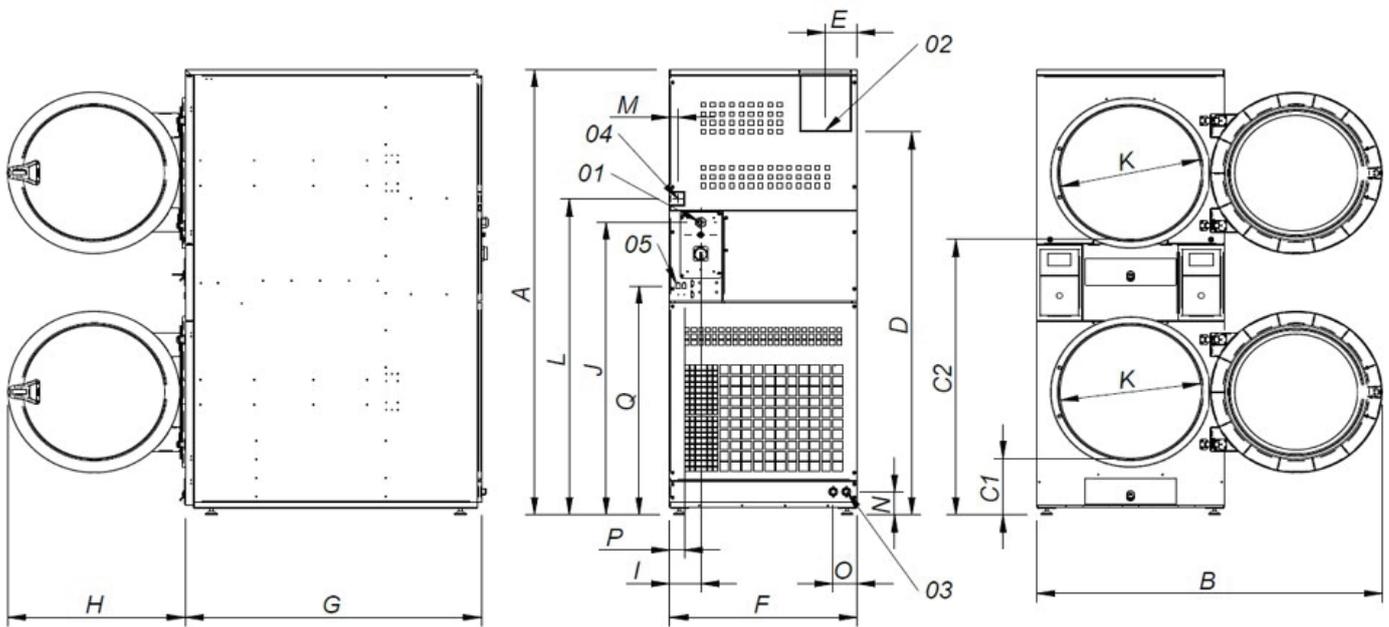

- 01. Power supply
- 02. Vent size 1x8" / 1x200
- 03. 2 Sprinkler valves 3/4"
- 04. Gas inlet 3/4"
- 05. Ethernet connection

Inches	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
FD-2-35 TP2 XP	78	57	9.62	48.6	63.8	5.31	30.9	50	28.93	5.11	50.19	22.63	55.7	1.4	4.05	3.93	2.36	40.07



# DRYING

## FD-2-50 TP2 ADVANCE STACK DRYERS



Fagor commercial dryers are perfect for laundromats, hotels, hospitals, nursing homes, and more.

You'll see a reduction in energy consumption, better drying results, and longer garment/linen life.

### TOUCH PLUS CONTROL

- 7" touchscreen, intuitive and flexible programming
- USB Connection: software free of charge
- 37 languages, continually expanded
- Upload videos to display, use for ads, instructions, etc.

### CONNECTIVITY

- FagorKconnect - IoT
- Provided at NO extra charge
- Manage your laundry anywhere, at anytime, 24/7
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and much more.

### EFFICIENCY

- Reversing drum action, standard
- Optimized, mixed airflow
- Frequency inverter standard

### VERSATILITY

- Easily converts from OPL to COIN
- Wetcleaning ready, programmable

### ERGONOMICS

- Large doors, easy loading, unloading
- Stainless steel mesh lint filter

### MAINTENANCE

- Hinged front control panel, easy and ergonomic access
- Technical menu, statistics for technicians
- Common parts across all models


### MORE INFO

- Grey skin plate outer casing, stainless look
- Stainless steel drum
- Drum with stamped holes
- Anti-wrinkle at end of cycle
- CE Approved

### OPTIONS

- FagorKconnect at no extra charge
- Dosing/spray system
- Integrated Fire Extinguishing System
- iDry - Intelligent humidity control. Temperature probe at drum inlet.
- Back panel external air + filter
- Lint filter with various grids
- Stainless steel front and side panels
- Reversible door
- Heating options, natural gas and propane
- Tropicalized model
- Coin/token kit

DRUM		FD-2-50 TP2
Capacity 1/18	lb / kg	53.6 x 2 / 24.3 x 2
Capacity 1/20	lb / Kg	48.3 x 2 / 21.9 x 2
Drum Diameter	inch / mm	32.87 / 835
Drum Depth	inch / mm	31.5 / 800
Drum Volume	cu ft / L	15.54 / 440
Door Opening	inch / mm	22.63 / 575
Floor to lower part of the door	Top Pocket - inch / mm	52.3 / 330
	Bottom Pocket - inch / mm	11.2 / 286
Drum motor power	HP / kW	.5 x 2 / 0.37 x 2
GAS POWER		
Installed heating power gas	Btu/h / kW	103658.5 x 2 / 30.4 x 2
Evaporation capacity	US gallon/h / liters/hr	11.624 / 44
Gas inlet	BSPP ISO 228-1	3/4"
VENTILATION		
Normal air flow	cfm / m3/h	529.72 x 2 / 900 x 2
Vent size	inch / mm	1 x 10 / 1 x 250
Fan motor power	HP / kW	.74 x 2 / 0.55 x 2
CONNECTIONS		GAS
Voltage 120/60/1~ I + G	N° x AWG / A	3 X 10 / 30 A
Voltage 230V - 3~ + G		
Voltage 480V - 3~ + G		
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	inch / mm	34.25 / 37.4 / 870 / 950
Net depth / Gross depth	inch / mm	51.65 / 54.92 / 1312 / 1395
Net height / Gross height	inch / mm	83.39 / 88.58 / 2118 / 2250
Net weight / Gross weight	lb / Kg	824 / 856.50 / 374 / 388.5

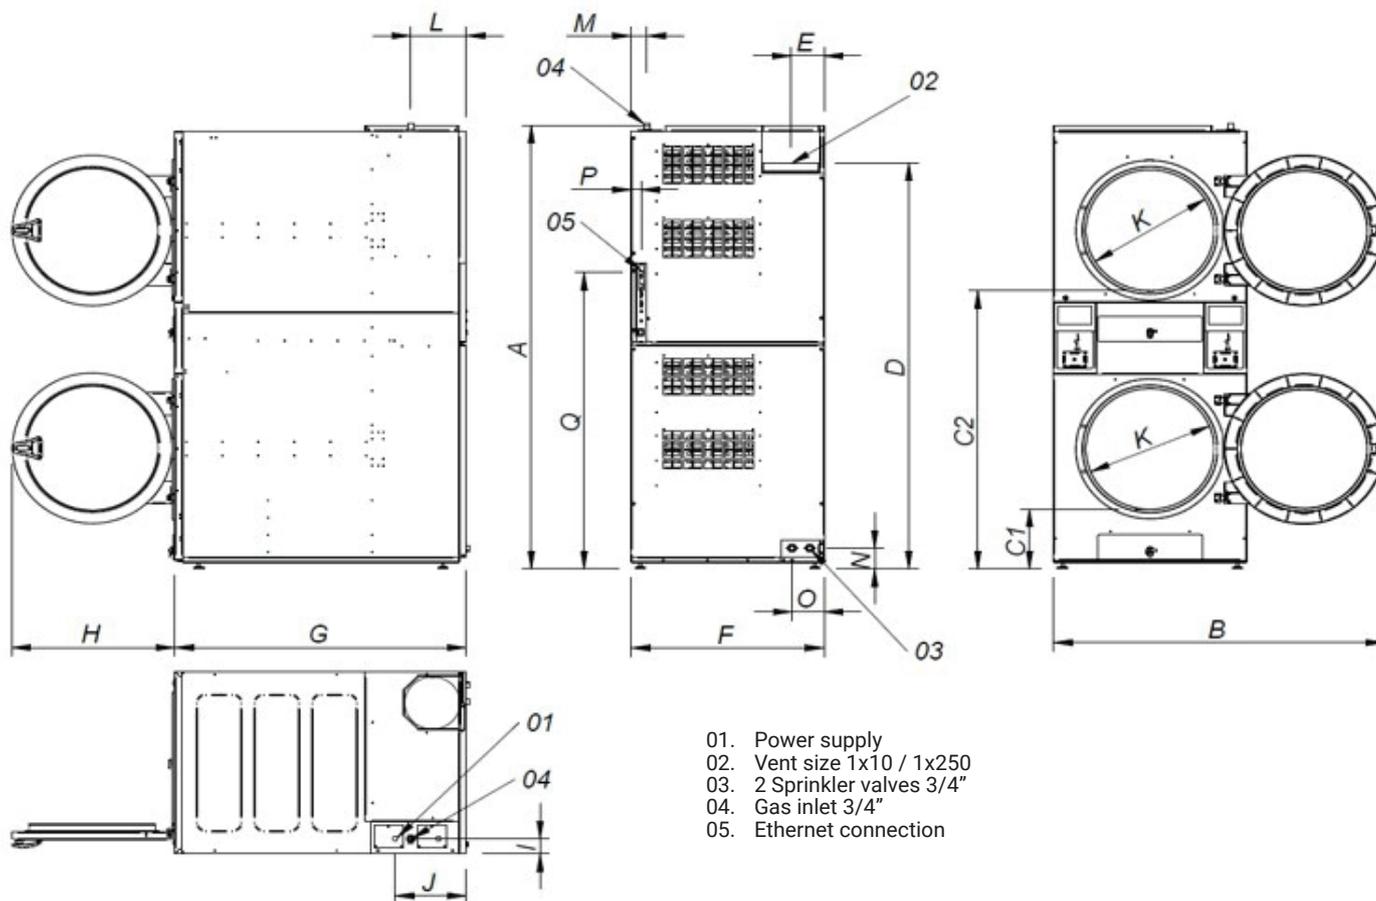

Inches	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
FD-2-50 TP2	83.38	58.66	11.25	52.36	76.37	5.84	34.25	51.65	28.93	2.87	12.56	22.63	9.84	2.7	3.93	5.70	1.77	55.74