



DRYING

STACK DRYERS ECONOMIC LINE FED 2-25 MG



FEATURES

M PROGRAMMER

- M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

- Reversing drum action is standard.
- Frequency inverter is standard.
- Galvanized drum is standard.

VERSATILITY

- Make to order - customization.
- OPL > COIN - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS

- Lint Filter Drawer, stainless steel mesh.
- Large Loading Doors.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console.

OTHERS


- COOL DOWN - anti-wrinkle at the end of the cycle.
- Heating options: natural gas and propane
- White panels
- CE approved.

OPTIONS

- M programmer display.
- Lint filter with grid 0,01 In (standard STACK is 0,02 In).

CAPACITY		U.	FED-2-25 MG
Capacity 1/18	Kg	11.7 x 2	
	Lb	25.7 x 2	
Capacity 1/20	Kg	10.5 x 2	
	Lb	23.1 x 2	
DRUM			
Ø Drum	mm	750	
	inch	29.53	
Drum length	mm	475	
	inch	18.7	
Drum volume	l cu	210	
	ft	7.41	
Ø Door	mm	574	
	inch	22.6	
Floor to door center	mm	547 / 1522	
	inch	21.54 / 59.92	
Floor to lower part of the door	mm	189 / 1164	
	inch	7.32 / 45.83	
Drum motor power	kW	0.37 x 2	
ELECTRIC POWER			
Installed heating power	Kw	12 x 2	
Installed electrical power	Kw	25.34	
Evaporation capacity	l/h	15.8	
	USgallon/h	4.17	
Hourly output	Kg/h	31.6	
	Lb/h	69.7	
GAS POWER			
Installed heating power gas Installed	kcal/h	10327 x 2	
	Btu/h	40945.7 x 2	
heating power gas	kW	12 x 2	
Installed electrical power	Kw	1.34	
Instant propane gas consumption (G31)	Kg/h	1.03 x 2	
	Lb/h	2.27 x 2	
Instant natural gas consumption (G20)	m³/h	1.27 x 2	
	cfm	0.75 x2	
Evaporation capacity	l/h	15.3	
	USgallon/h	4.042	
Hourly output Ø	Kg/h	30.6	
	Lb/h	67.5	
Gas inlet	BSPP ISO 228-1	1/2"	
VENTILATION			
Nominal air flow	m³/h	500 x 2	
	cfm	294.28 x 2	
Air outlet Ø	mm	200	
	inch	8	
Fan motor power	kW	0.25 x 2	
HEAT DISSIPATION			
Total max heat dissipation	kW	2.4	
	Btu/h	8193.9	
Front panel max heat dissipation	kW	1.68	
	Btu/h	5735.8	
CONNECTIONS		ELECTRICAL	GAS
Voltage 120/60/1~ l + G	Nº x AWG / A	-	3 X 14 /15 A
Voltage 230V - 3~ + G	-	-	-
Voltage 480V - 3~ + G	-	-	-

DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	785 / 865
	inch	30.91 / 34.06
Net depth / Gross depth	mm	972 / 1055
	inch	38.27 / 41.54
Net height / Gross height	mm	1980 / 2126
	inch	77.95 / 83.70
Net weight / Gross weight	Kg	260 / 268
	Lb	573.2 / 590.84
OTHERS		
Sound level	dB	64

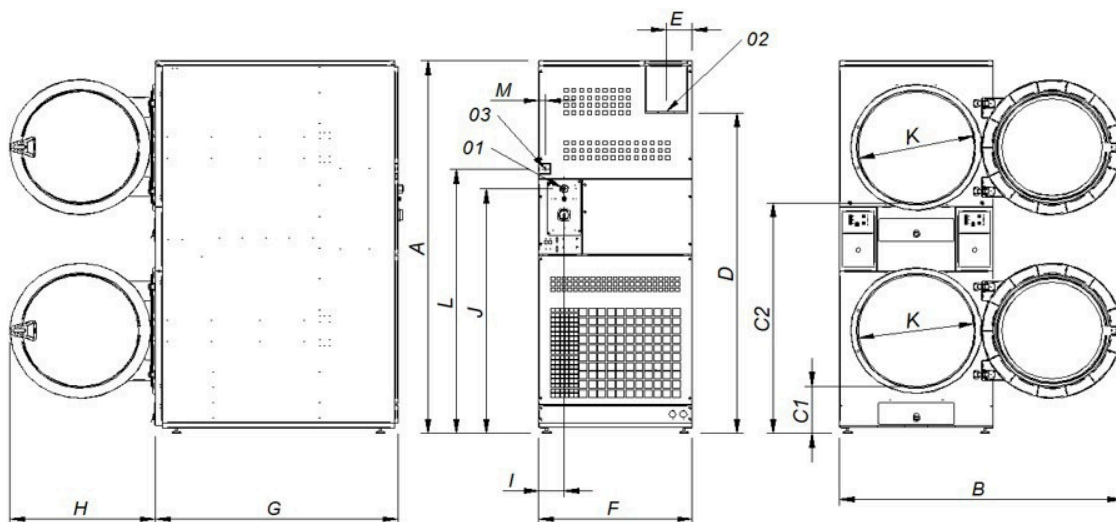

01. Power supply 02.
Fumes output 8"
03. Gas inlet 1/2"

	A	B	C	C2	D	E	F	G	H	I	J	K	L	M
FED-2-25 MG	77.95	56.96	10.07	48.58	66.14	5.31	30.90	38.26	28.93	5.11	50.19	22.63	55.35	1.37



DRYING

STACK DRYERS ECONOMIC LINE FED 2-35 MG



CHARACTERISTICS

M PROGRAMMER

- M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

- Reversing drum action is standard.
- Frequency inverter is standard.
- Galvanized drum is standard.

VERSATILITY

- Make to order - customization.
- OPL > COIN - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS

- Lint Filter Drawer, stainless steel mesh.
- Large Loading Doors.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console.

OTHERS


- COOL DOWN - anti-wrinkle at the end of the cycle.
- Heating options: natural gas and propane
- White panels
- CE approved.

OPTIONS

- M programmer display.
- Lint filter with grid 0,01 In (standard STACK is 0,02 In).

CAPACITY		U.	FED-2-35 MG
Capacity 1/18	Kg	18.3 x 2	
	Lb	40.4	
Capacity 1/20	Kg	16.5 x 2	
	Lb	36.3	
DRUM			
Ø Drum	mm	750	
	inch	29.53	
Drum length	mm	746	
	inch	29.37	
Drum volume	l cu	330	
	ft	11.64	
Ø Door	mm	574	
	inch	22.6	
Floor to door center	mm	547 / 1522	
	inch	21.54 / 59.92	
Floor to lower part of the door	mm	189 / 1164	
	inch	7.32/45.83	
Drum motor power	kW	0.37 x 2	
ELECTRIC POWER			
Installed heating power	Kw	1.12 x 2	
Installed electrical power	Kw	25.34	
Evaporation capacity	l/h	18.1	
	USgallon/h	4.78	
Hourly output	Kg/h	36.2	
	Lb/h	79.8	
GAS POWER			
Installed heating power gas Installed	kcal/h	10327 x 2	
	Btu/h	40945.7 x 2	
heating power gas	kW	12 x 2	
Installed electrical power	Kw	1.34	
Instant propane gas consumption (G31)	Kg/h	1.03 x 2	
	Lb/h	2.27 x 2	
Instant natural gas consumption (G20)	m³/h	1.27 x 2	
	cfm	0.75 x 2	
Evaporation capacity	l/h	18	
	USgallon/h	4.755	
Hourly output Ø	Kg/h	36	
	Lb/h	79.4	
Gas inlet	BSPP ISO 228-1	1/2"	
VENTILATION			
Nominal air flow	m³/h	500 x 2	
	cfm	294.28 x 2	
Air outlet Ø	mm	200	
	inch	8	
Fan motor power	kW	0.25 x 2	
HEAT DISSIPATION			
Total max heat dissipation	kW	2.4	
	Btu/h	8193.9	
Front panel max heat dissipation	kW	1.68	
	Btu/h	5735.8	
CONNECTIONS		ELECTRICAL	GAS
Voltage 120/60/1~ I + G	Nº x AWG / A	-	3 X 14 /15 A
Voltage 230V - 3~ + G	-	-	-
Voltage 480V - 3~ + G	-	-	-

DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	785 / 865
	inch	30.91 / 34.06
Net depth / Gross depth	mm	1242 / 1325
	inch	48.9 / 52.17
Net height / Gross height	mm	1980 / 2126
	inch	77.95 / 83.7
Net weight / Gross weight	Kg	290 / 317
	Lb	639.34 / 698.87
OTHERS		
Sound level	dB	64

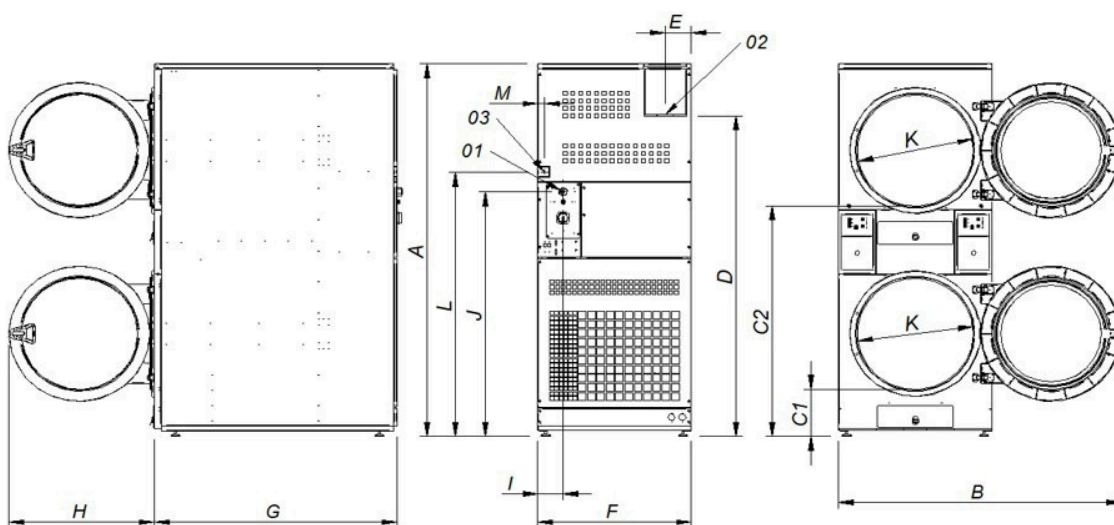

01. Power supply 02.
Fumes output 8"
03. Gas inlet 1/2"

	A	B	C	C2	D	E	F	G	H	I	J	K	L	M
FED-2-25 MG	77.95	56.96	10.07	48.58	66.14	5.31	30.90	48.89	28.93	5.11	50.19	22.63	55.35	1.37



DRYING

STACK DRYERS ECONOMIC LINE FED-2-50 MG

CHARACTERISTICS

M PROGRAMMER

- M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

- Reversing drum action is standard.
- Frequency inverter is standard.
- Galvanized drum is standard.

VERSATILITY

- Make to order - customization.
- OPL > COIN - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS

- Lint Filter Drawer, stainless steel mesh.
- Large Loading Doors.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics for technicians and maintenance with external console (with console option).

OTHERS


- COOL DOWN - anti-wrinkle at the end of the cycle.
- Heating options: natural gas and propane
- White panels
- CE approved.

OPTIONS

- M programmer display.
- Lint filter with grid 0,01 In (standard STACK is 0,02 In).



CAPACITY		
Capacity 1/18	U.	FED-2-50 MG
	Kg	24.3 x 2
Capacity 1/20	Lb	53.6 x 2
	Kg	21.9 x 2
	Lb	48.3 x 2
DRUM		
Ø Drum	mm	835
	inch	32.87
Drum length	mm	800
	inch	31.5
Drum volume	l cu	440
	ft	15.54
Ø Door	mm	575
	inch	22.64
Floor to door center	mm	574 / 1618
	inch	22.60 / 63.70
Floor to lower part of the door Drum	mm	214 / 1258
	inch	8.46/49.53
motor power	kW	0.37 x 2
GAS POWER		
Installed heating power gas	kcal/h	26139 x 2
	Btu/h	103658.5 x 2
Installed heating power gas	kW	30.4 x 2
Installed electrical power	Kw	1.94
Instant propane gas consumption (G31)	Kg/h	2.61 x 2
	Lb/h	5.75 x 2
Instant natural gas consumption (G20)	m³/h	3.22 x 2
	cfm	1.89 x 2
Evaporation capacity	l/h	44
	USgallon/h	11.624
Hourly output Ø	Kg/h	88
	Lb/h	194
Gas inlet	BSPP ISO 228-1	3/4"
VENTILATION		
Nominal air flow	m³/h	900 x 2
	cfm	529.72 x 2
Air outlet Ø	mm	250
	inch	10
Fan motor power	kW	0.55 x 2
HEAT DISSIPATION		
Total max heat dissipation	kW	2.6
	Btu/h	8876.8
Front pannel max heat dissipation	kW	1.9
	Btu/h	6486.9
CONNECTIONS		
Voltage 120/60/1~ I + G	Nº x AWG / A	3 X 10 / 30 A
Voltage 230V - 3~ + G	-	-
Voltage 480V - 3~ + G	-	-
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	870 / 950
	inch	34.25 / 37.4
Net depth / Gross depth	mm	1312 / 1395
	inch	51.65 / 54.92
Net height / Gross height	mm	2118 / 2250
	inch	83.39 / 88.58
Net weight / Gross weight	Kg	373.5 / 388.5
	Lb	823.43 / 856.50
OTHERS		
Sound level	dB	64

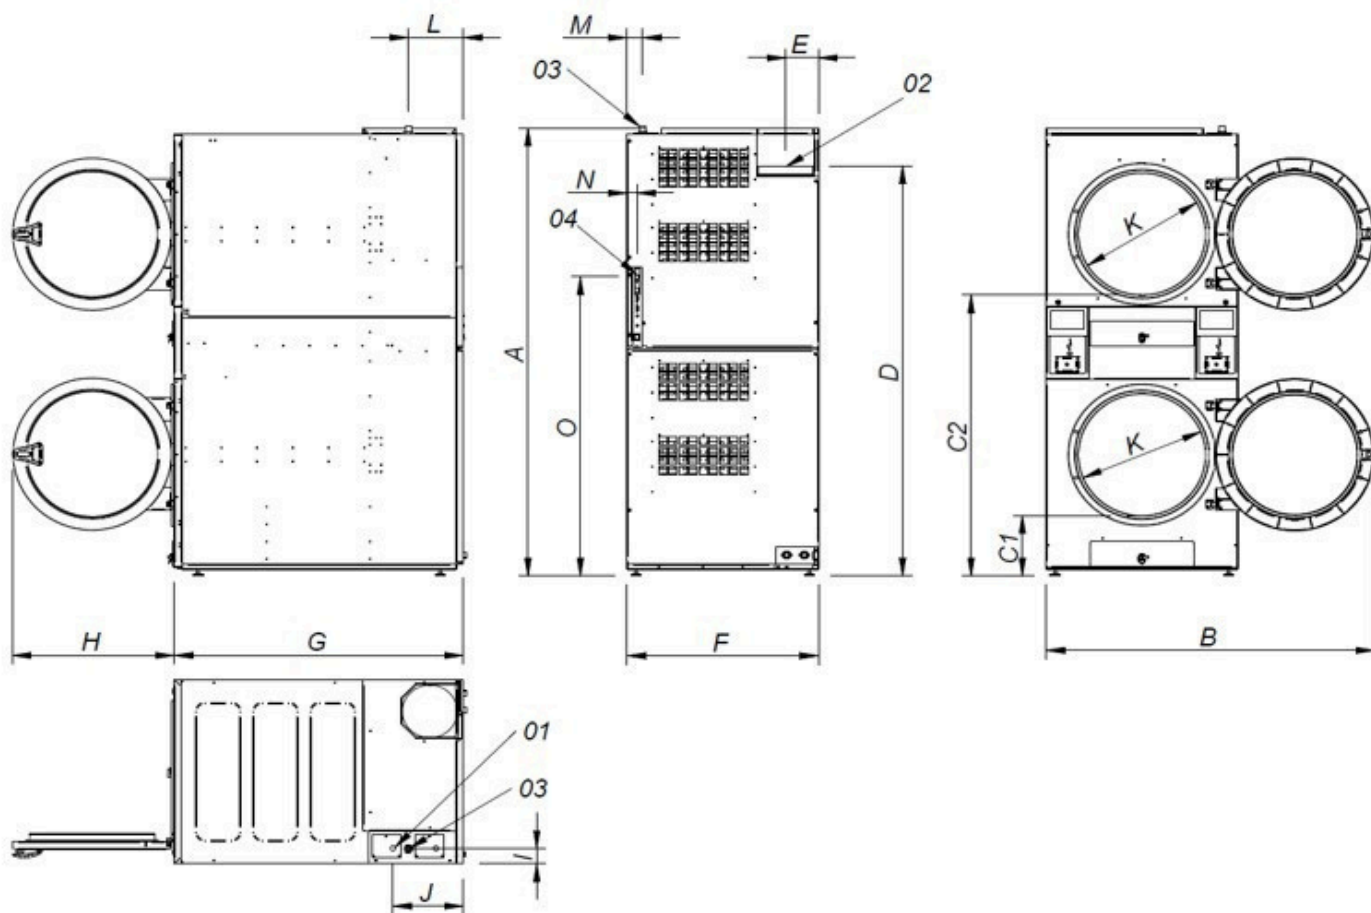

01. Power supply
02. Fumes output 10"
03. 2 Sprinkler valves 3/4"
04. Ethernet connection (Only control Touch)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
FED-2-50 MG	83.38	56.66	11.25	52.36	76.37	5.84	34.25	51.65	28.93	2.87	12.59	22.63	9.84	2.75	1.77	55.74