



WASHING

FWS-25 TP2 25LB CAPACITY NORMAL SPIN WASHER



TOUCH PLUS CONTROL

- 7" touchscreen – intuitive and completely programmable
- USB Connection: software free of charge
- 37 languages, continually expanding
- Upload videos to display, use for ads, instructions, etc.

G-FORCE EXTRACTION

- 25-100 lb capacity washers: 200G
- 135 lb capacity washers: 150G

CONNECTIVITY

- FagorKonnnect, standard
- Provided at NO extra charge
- Manage your laundry operations from anywhere, 24/7
- Remote diagnosis and technical service
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and more

EFFICIENCY

- Low energy and water consumption
- Intelligent consumption

VERSATILITY

- Easily converts from OPL to COIN
- Electric heating < > Hot water
- Wetcleaning ready
- Extraction speed and water levels easily programmed for wetcleaning, firehouse, etc.
- Machines can be customized, made to order

ERGONOMICS & DOOR HANDLE

- Reversible doors, standard – industry exclusive
- Industry leading large doors for easy loading and unloading
- Metal door handle, commercial grade
- Door pin guide to prevent door miss locking

MAINTENANCE

- Hinged front control panel – easy and ergonomic access
- Complete technical menu
- Common parts across all models

MORE INFO

- Hard mounted washer anchoring to floor with anchoring base
- Stainless steel front and top panels
- 3 water inlets
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- CB & WRAS approved product Option ETL

OPTIONS


- Anchoring base
- Auto unlock kit for door (in case of power failure) – recommended for vended laundries
- Silicon gasket
- Relay card with 6 extra dosing signals: up to 14 signals
- 5 Extra dosing pumps
- Dosing pump kit available
- Normally closed drain valve
- Double drain kit
- Sluice – Drum
- Tropicalized model: protected board
- Steam kit available
- Maritime (oil rigs) electric models available
- Coin/token kit

TECHNICAL DATA

NORMAL SPIN WASHER | FWS-25 TP2

FWS-25 TP2			
DRUM			
Load capacity	lbs	25	
Volume	cu. ft.	3.5	
Diameter	in	24.1	
Depth	in	12.99	
GENERAL DETAILS			
Washing speed / spinning speed	r.p.m.	53 / 759	
G Factor	-	200	
Coin laundry version	-	Yes	
Double drain	-	No	
Weighing System / Tilting System	-	No	
DOOR			
Height center door / Height door	in	22.4 /12.2	
Diameter	in	14.6	
POWER			
Motor Power Consumption	hp	1.47	
CONNECTIONS		Electric Heating	Hot Water/Steam
Voltage 208-240/60/1~ + G	FLA/A	27.5/40	5.2/15
Voltage 208-240/60/3~ + G	FLA/A	16/20	-
Voltage 440-480/3~ + G	FLA/A	-	4.7/15
Steam inlet (Steam model)	in	1/2"	
Water inlet	in	3/4"	
Water main pressure	Kg/cm ²	2-4	
Maximum Water Consumption	Gal	16.2*	
Drain	in	3"	
Drainage capacity	Gal/min	52.8	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	in	28.31 / 30.5	
Net depth / Gross depth	in	29.72 / 35	
Net height / Gross height	in	45.87 / 57	
Net weight / Gross weight	lbs	437 / 520	

* Programme No. 20, 75% load

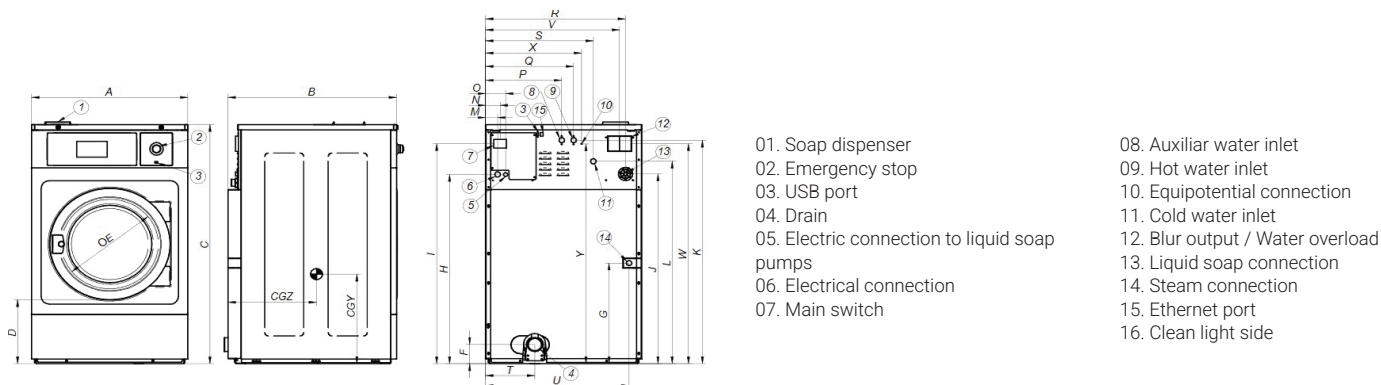

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
in	28.31	29.75	45.87	12.20	14.69	5.83	17.32	34.88	41.50	35.00	42.24	37.72	2.40	2.91	3.98	12.44	14.80	25.08	18.70	8.31	25.75	23.90	41.46	16.38	41.46	15.08	20.12



WASHING

FWS-30 TP2 30LB CAPACITY NORMAL SPIN WASHER



TOUCH PLUS CONTROL

- 7" touchscreen – intuitive and completely programmable
- USB Connection: software free of charge
- 37 languages, continually expanding
- Upload videos to display, use for ads, instructions, etc.

G-FORCE EXTRACTION

- 25-100 lb capacity washers: 200G
- 135 lb capacity washers: 150G

CONNECTIVITY

- FagorKonnnect, standard
- Provided at NO extra charge
- Manage your laundry operations from anywhere, 24/7
- Remote diagnosis and technical service
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and more

EFFICIENCY

- Low energy and water consumption
- Intelligent consumption

VERSATILITY

- Easily converts from OPL to COIN
- Electric heating < > Hot water
- Wetcleaning ready
- Extraction speed and water levels easily programmed for wetcleaning, firehouse, etc.
- Machines can be customized, made to order

ERGONOMICS & DOOR HANDLE

- Reversible doors, standard – industry exclusive
- Industry leading large doors for easy loading and unloading
- Metal door handle, commercial grade
- Door pin guide to prevent door miss locking

MAINTENANCE

- Hinged front control panel – easy and ergonomic access
- Complete technical menu
- Common parts across all models

MORE INFO

- Hard mounted washer anchoring to floor with anchoring base
- Stainless steel front and top panels
- 3 water inlets
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- CB & WRAS approved product Option ETL

OPTIONS


- Anchoring base
- Auto unlock kit for door (in case of power failure) – recommended for vended laundries
- Silicon gasket
- Relay card with 6 extra dosing signals: up to 14 signals
- 5 Extra dosing pumps
- Dosing pump kit available
- Normally closed drain valve
- Double drain kit
- Sluice – Drum
- Tropicalized model: protected board
- Steam kit available
- Maritime (oil rigs) electric models available
- Coin/token kit

TECHNICAL DATA

NORMAL SPIN WASHER | FWS-30 TP2

FWS-30 TP2			
DRUM			
Load capacity	lbs	30	
Volume	cu. ft.	4.6	
Diameter	in	24.1	
Depth	in	16.9	
GENERAL DETAILS			
Washing speed / spinning speed	r.p.m.	53 / 759	
G Factor	-	200	
Coin laundry version	-	Yes	
Double drain	-	Opt	
Weighing System / Tilting System	-	No	
DOOR			
Height center door / Height door	in	22.4 /12.2	
Diameter	in	14.6	
POWER			
Motor Power Consumption	hp	1.47	
CONNECTIONS		Electric Heating	Hot Water/Steam
Voltage 208-240/60/1~ + G	FLA/A	40/50	5.2/15
Voltage 208-240/60/3~ + G	FLA/A	24/30	-
Voltage 440-480/3~ + G	FLA/A	-	4.7/15
Steam inlet (Steam model)	in	1/2"	
Water inlet	in	3/4"	
Water main pressure	Kg/cm ²	2-4	
Maximum Water Consumption	Gal	20.8*	
Drain	in	3"	
Drainage capacity	Gal/min	52.8	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	in	28.31 / 30.5	
Net depth / Gross depth	in	33.7 / 40	
Net height / Gross height	in	45.87 / 57	
Net weight / Gross weight	lbs	463 / 545	

* Programme No. 20, 75% load

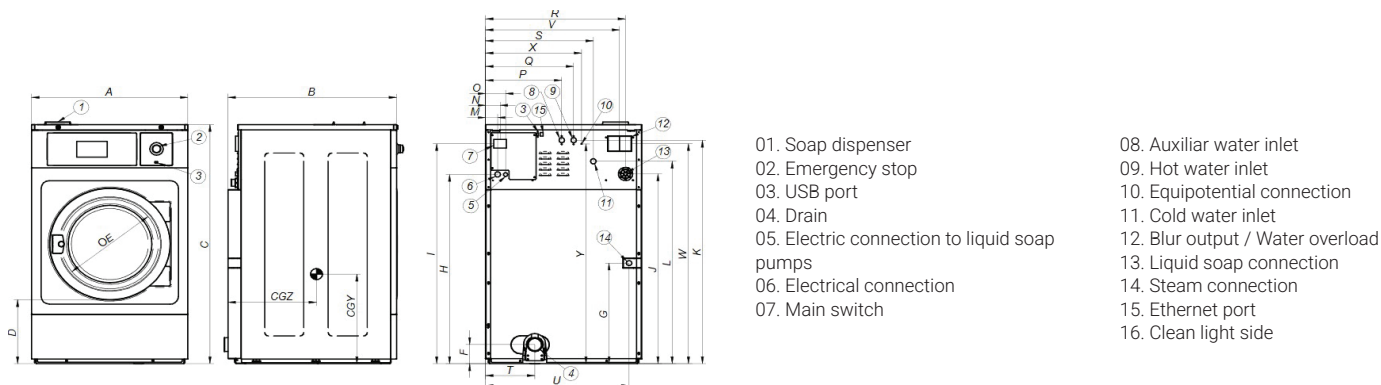

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
in	28.31	33.70	45.87	12.20	14.69	5.83	17.32	34.88	41.50	35.00	42.24	37.72	2.40	2.91	3.98	12.44	14.80	25.08	18.70	8.31	25.75	23.90	41.46	16.38	41.46	19.06	20.63



WASHING

FWS-40 TP2 40LB CAPACITY NORMAL SPIN WASHER



TOUCH PLUS CONTROL

- 7" touchscreen – intuitive and completely programmable
- USB Connection: software free of charge
- 37 languages, continually expanding
- Upload videos to display, use for ads, instructions, etc.

G-FORCE EXTRACTION

- 25-100 lb capacity washers: 200G
- 135 lb capacity washers: 150G

CONNECTIVITY

- FagorKonnnect, standard
- Provided at NO extra charge
- Manage your laundry operations from anywhere, 24/7
- Remote diagnosis and technical service
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and more

EFFICIENCY

- Low energy and water consumption
- Intelligent consumption

VERSATILITY

- Easily converts from OPL to COIN
- Electric heating < > Hot water
- Wetcleaning ready
- Extraction speed and water levels easily programmed for wetcleaning, firehouse, etc.
- Machines can be customized, made to order

ERGONOMICS & DOOR HANDLE

- Reversible doors, standard – industry exclusive
- Industry leading large doors for easy loading and unloading
- Metal door handle, commercial grade
- Door pin guide to prevent door miss locking

MAINTENANCE

- Hinged front control panel – easy and ergonomic access
- Complete technical menu
- Common parts across all models

MORE INFO

- Hard mounted washer anchoring to floor with anchoring base
- Stainless steel front and top panels
- 3 water inlets
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- CB & WRAS approved product Option ETL

OPTIONS


- Anchoring base
- Auto unlock kit for door (in case of power failure) – recommended for vended laundries
- Silicon gasket
- Relay card with 6 extra dosing signals: up to 14 signals
- 5 Extra dosing pumps
- Dosing pump kit available
- Normally closed drain valve
- Double drain kit
- Sluice – Drum
- Tropicalized model: protected board
- Steam kit available
- Maritime (oil rigs) electric models available
- Coin/token kit

TECHNICAL DATA

NORMAL SPIN WASHER | FWS-40 TP2

FWS-40 TP2			
DRUM			
Load capacity	lbs	40	
Volume	cu. ft.	6.4	
Diameter	in	27.5	
Depth	in	18.5	
GENERAL DETAILS			
Washing speed / spinning speed	r.p.m.	50 / 714	
G Factor	-	200	
Coin laundry version	-	Yes	
Double drain	-	Opt	
Weighing System / Tilting System	-	No	
DOOR			
Height center door / Height door	in	22.78 / 13.7	
Diameter	in	18.1	
POWER			
Motor Power Consumption	hp	2.95	
CONNECTIONS		Electric Heating	Hot Water/Steam
Voltage 208-240/60/1~ + G	FLA/A	55/70	8.9/15
Voltage 208-240/60/3~ + G	FLA/A	32/40	-
Voltage 440-480/3~ + G	FLA/A	-	7.8/15
Steam inlet (Steam model)	in	1/2"	
Water inlet	in	3/4"	
Water main pressure	Kg/cm ²	2-4	
Maximum Water Consumption	Gal	31.7*	
Drain	in	3"	
Drainage capacity	Gal/min	52.8	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	in	31.02 / 33	
Net depth / Gross depth	in	36.81 / 41	
Net height / Gross height	in	51.46 / 63	
Net weight / Gross weight	lbs	600 / 680	

* Programme No. 20, 75% load

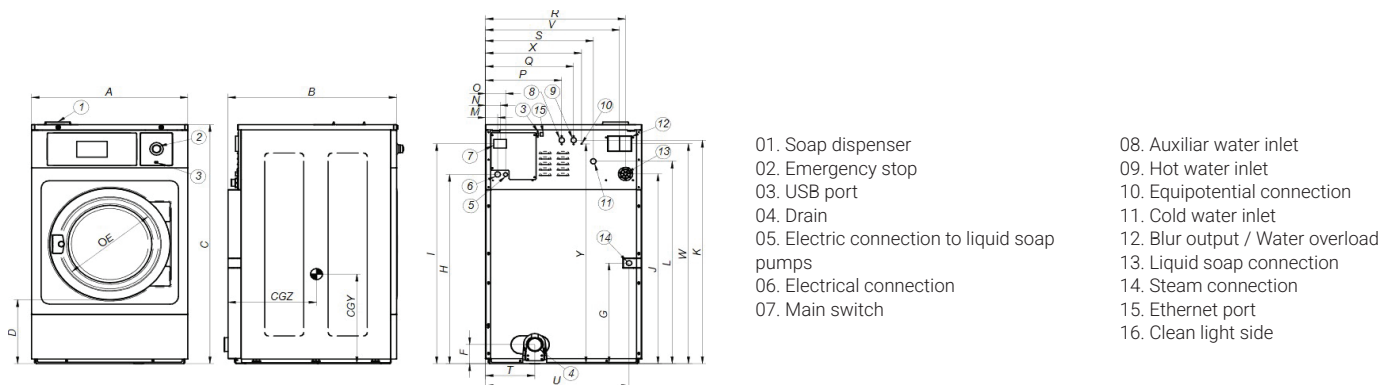

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
in	31.02	36.81	51.46	13.70	18.11	5.63	21.73	40.75	47.36	40.87	48.11	43.58	2.40	2.91	3.98	15.16	17.52	27.80	21.42	9.65	28.50	26.61	47.32	19.09	47.32	18.86	21.50



WASHING

FWS-50 TP2 50LB CAPACITY NORMAL SPIN WASHER



TOUCH PLUS CONTROL

- 7" touchscreen – intuitive and completely programmable
- USB Connection: software free of charge
- 37 languages, continually expanding
- Upload videos to display, use for ads, instructions, etc.

G-FORCE EXTRACTION

- 25-100 lb capacity washers: 200G
- 135 lb capacity washers: 150G

CONNECTIVITY

- FagorKonnnect, standard
- Provided at NO extra charge
- Manage your laundry operations from anywhere, 24/7
- Remote diagnosis and technical service
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and more

EFFICIENCY

- Low energy and water consumption
- Intelligent consumption

VERSATILITY

- Easily converts from OPL to COIN
- Electric heating < > Hot water
- Wetcleaning ready
- Extraction speed and water levels easily programmed for wetcleaning, firehouse, etc.
- Machines can be customized, made to order

ERGONOMICS & DOOR HANDLE

- Reversible doors, standard – industry exclusive
- Industry leading large doors for easy loading and unloading
- Metal door handle, commercial grade
- Door pin guide to prevent door miss locking

MAINTENANCE

- Hinged front control panel – easy and ergonomic access
- Complete technical menu
- Common parts across all models

MORE INFO

- Hard mounted washer anchoring to floor with anchoring base
- Stainless steel front and top panels
- 3 water inlets
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- CB & WRAS approved product
Option ETL

OPTIONS


- Anchoring base
- Auto unlock kit for door (in case of power failure) – recommended for vended laundries
- Silicon gasket
- Relay card with 6 extra dosing signals: up to 14 signals
- 5 Extra dosing pumps
- Dosing pump kit available
- Normally closed drain valve
- Double drain kit
- Sluice – Drum
- Tropicalized model: protected board
- Steam kit available
- Maritime (oil rigs) electric models available
- Coin/token kit

TECHNICAL DATA

NORMAL SPIN WASHER | FWS-50 TP2

FWS-50 TP2			
DRUM			
Load capacity	lbs	50	
Volume	cu. ft.	7.8	
Diameter	in	27.5	
Depth	in	22	
GENERAL DETAILS			
Washing speed / spinning speed	r.p.m.	50 / 714	
G Factor	-	200	
Coin laundry version	-	Yes	
Double drain	-	Opt	
Weighing System / Tilting System	-	No	
DOOR			
Height center door / Height door	in	22.78 / 13.7	
Diameter	in	18.1	
POWER			
Motor Power Consumption	hp	2.95	
CONNECTIONS		Electric Heating	Hot Water/Steam
Voltage 208-240/60/1~ + G	FLA/A	55/70	8.9/15
Voltage 208-240/60/3~ + G	FLA/A	32/40	-
Voltage 440-480/3~ + G	FLA/A	-	7.8/15
Steam inlet (Steam model)	in	1/2"	
Water inlet	in	3/4"	
Water main pressure	Kg/cm ²	2-4	
Maximum Water Consumption	Gal	31.7*	
Drain	in	3"	
Drainage capacity	Gal/min	52.8	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	in	31.02 / 33	
Net depth / Gross depth	in	40.75 / 43.5	
Net height / Gross height	in	51.46 / 63	
Net weight / Gross weight	lbs	651 / 738	

* Programme No. 20, 75% load

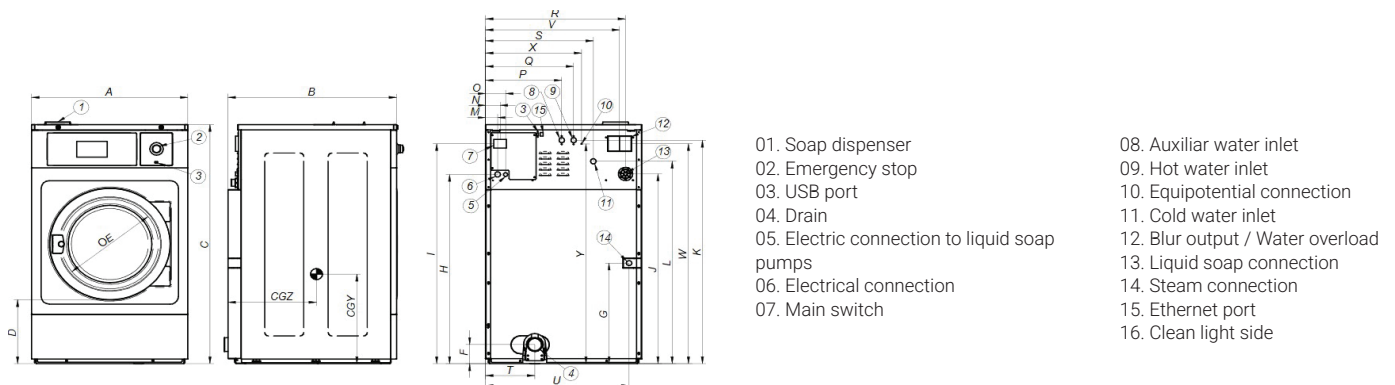

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
in	31.02	40.75	51.46	13.70	18.11	5.63	21.73	40.75	47.36	40.87	48.11	43.58	2.40	2.91	3.98	15.16	17.52	27.80	21.42	9.65	28.50	26.61	47.32	19.09	47.32	18.86	23.07



WASHING

FWS-65 TP2 65LB CAPACITY NORMAL SPIN WASHER



TOUCH PLUS CONTROL

- 7" touchscreen – intuitive and completely programmable
- USB Connection: software free of charge
- 37 languages, continually expanding
- Upload videos to display, use for ads, instructions, etc.

G-FORCE EXTRACTION

- 25-100 lb capacity washers: 200G
- 135 lb capacity washers: 150G

CONNECTIVITY

- FagorKonnnect, standard
- Provided at NO extra charge
- Manage your laundry operations from anywhere, 24/7
- Remote diagnosis and technical service
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and more

EFFICIENCY

- Low energy and water consumption
- Intelligent consumption

VERSATILITY

- Easily converts from OPL to COIN
- Electric heating < > Hot water
- Wetcleaning ready
- Extraction speed and water levels easily programmed for wetcleaning, firehouse, etc.
- Machines can be customized, made to order

ERGONOMICS & DOOR HANDLE

- Reversible doors, standard – industry exclusive
- Industry leading large doors for easy loading and unloading
- Metal door handle, commercial grade
- Door pin guide to prevent door miss locking

MAINTENANCE

- Hinged front control panel – easy and ergonomic access
- Complete technical menu
- Common parts across all models

MORE INFO

- Hard mounted washer anchoring to floor with anchoring base
- Stainless steel front and top panels
- 3 water inlets
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- CB & WRAS approved product Option ETL

OPTIONS


- Anchoring base
- Auto unlock kit for door (in case of power failure) – recommended for vended laundries
- Silicon gasket
- Relay card with 6 extra dosing signals: up to 14 signals
- 5 Extra dosing pumps
- Dosing pump kit available
- Normally closed drain valve
- Double drain kit
- Sluice – Drum
- Tropicalized model: protected board
- Steam kit available
- Maritime (oil rigs) electric models available
- Coin/token kit

TECHNICAL DATA

NORMAL SPIN WASHER | FWS-65 TP2

FWS-65 TP2			
DRUM			
Load capacity	lbs	65	
Volume	cu. ft.	9.9	
Diameter	in	30.3	
Depth	in	23	
GENERAL DETAILS			
Washing speed / spinning speed	r.p.m.	48 / 682	
G Factor	-	200	
Coin laundry version	-	Yes	
Double drain	-	Opt	
Weighing System / Tilting System	-	No	
DOOR			
Height center door / Height door	in	27.5 / 15.7	
Diameter	in	18.1	
POWER			
Motor Power Consumption	hp	4.02	
CONNECTIONS		Electric Heating	Hot Water/Steam
Voltage 208-240/60/1~ + G	FLA/A	90.7/125	15.4/20
Voltage 208-240/60/3~ + G	FLA/A	50.4/70	14.5/20
Voltage 440-480/3~ + G	FLA/A	-	13.4/20
Steam inlet (Steam model)	in	3/4"	
Water inlet	in	3/4"	
Water main pressure	Kg/cm ²	2-4	
Maximum Water Consumption	Gal	43.5*	
Drain	in	3"	
Drainage capacity	Gal/min	52.8	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	in	34.8 / 35.5	
Net depth / Gross depth	in	42.32 / 47	
Net height / Gross height	in	52.76 / 63	
Net weight / Gross weight	lbs	889 / 922	

* Programme No. 20, 75% load

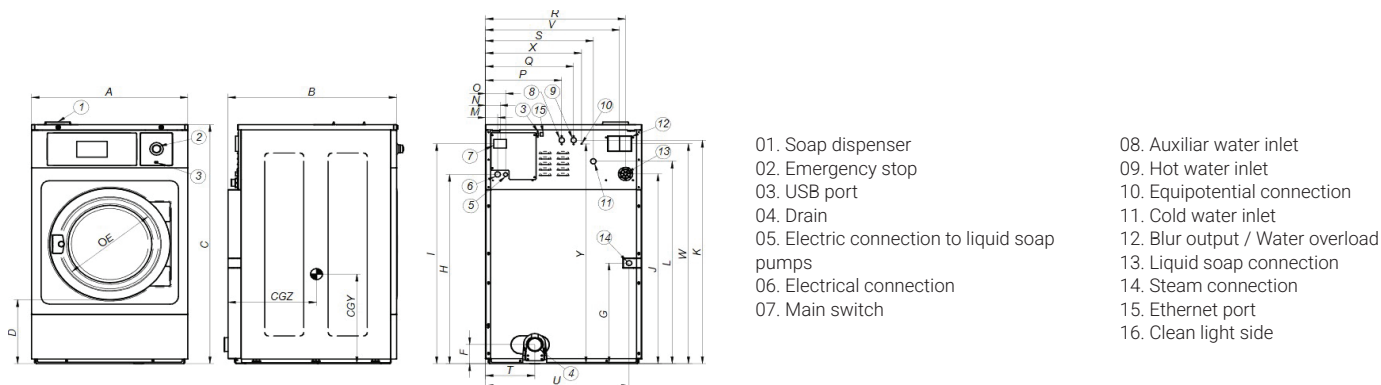

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
in	34.80	42.32	52.76	15.75	18.11	5.87	21.57	41.85	48.43	41.93	49.21	44.68	2.40	2.91	3.98	16.93	20.08	31.54	25.20	10.55	32.28	30.39	48.03	22.44	47.64	23.27	23.35



WASHING

FWS-80 TP2 80LB CAPACITY NORMAL SPIN WASHER



TOUCH PLUS CONTROL

- 7" touchscreen – intuitive and completely programmable
- USB Connection: software free of charge
- 37 languages, continually expanding
- Upload videos to display, use for ads, instructions, etc.

G-FORCE EXTRACTION

- 25-100 lb capacity washers: 200G
- 135 lb capacity washers: 150G

CONNECTIVITY

- FagorKonnnect, standard
- Provided at NO extra charge
- Manage your laundry operations from anywhere, 24/7
- Remote diagnosis and technical service
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and more

EFFICIENCY

- Low energy and water consumption
- Intelligent consumption

VERSATILITY

- Easily converts from OPL to COIN
- Electric heating < > Hot water
- Wetcleaning ready
- Extraction speed and water levels easily programmed for wetcleaning, firehouse, etc.
- Machines can be customized, made to order

ERGONOMICS & DOOR HANDLE

- Reversible doors, standard – industry exclusive
- Industry leading large doors for easy loading and unloading
- Metal door handle, commercial grade
- Door pin guide to prevent door miss locking

MAINTENANCE

- Hinged front control panel – easy and ergonomic access
- Complete technical menu
- Common parts across all models

MORE INFO

- Hard mounted washer anchoring to floor with anchoring base
- Stainless steel front and top panels
- 3 water inlets
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- CB & WRAS approved product Option ETL

OPTIONS


- Anchoring base
- Auto unlock kit for door (in case of power failure) – recommended for vended laundries
- Silicon gasket
- Relay card with 6 extra dosing signals: up to 14 signals
- 5 Extra dosing pumps
- Dosing pump kit available
- Normally closed drain valve
- Double drain kit
- Sluice – Drum
- Tropicalized model: protected board
- Steam kit available
- Maritime (oil rigs) electric models available
- Coin/token kit

TECHNICAL DATA

NORMAL SPIN WASHER | FWS-80 TP2

FWS-80 TP2			
DRUM			
Load capacity	lbs	80	
Volume	cu. ft.	12.44	
Diameter	in	33.8	
Depth	in	23.7	
GENERAL DETAILS			
Washing speed / spinning speed	r.p.m.	45 / 644	
G Factor	-	200	
Coin laundry version	-	Yes	
Double drain	-	Opt	
Weighing System / Tilting System	-	No	
DOOR			
Height center door / Height door	in	28.9 / 17.3	
Diameter	in	22	
POWER			
Motor Power Consumption	hp	5.35	
CONNECTIONS		Electric Heating	Hot Water/Steam
Voltage 208-240/60/1~ + G	FLA/A	-	15.4/20
Voltage 208-240/60/3~ + G	FLA/A	57.9/80	14.5/20
Voltage 440-480/3~ + G	FLA/A	-	13.4/20
Steam inlet (Steam model)	in	3/4"	
Water inlet	in	3/4"	
Water main pressure	Kg/cm ²	2-4	
Maximum Water Consumption	Gal	52.7*	
Drain	in	3"	
Drainage capacity	Gal/min	52.8	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	in	38.54 / 40	
Net depth / Gross depth	in	45.47 / 49	
Net height / Gross height	in	55.55 / 67	
Net weight / Gross weight	lbs	1,050 / 1,133	

* Programme No. 20, 75% load

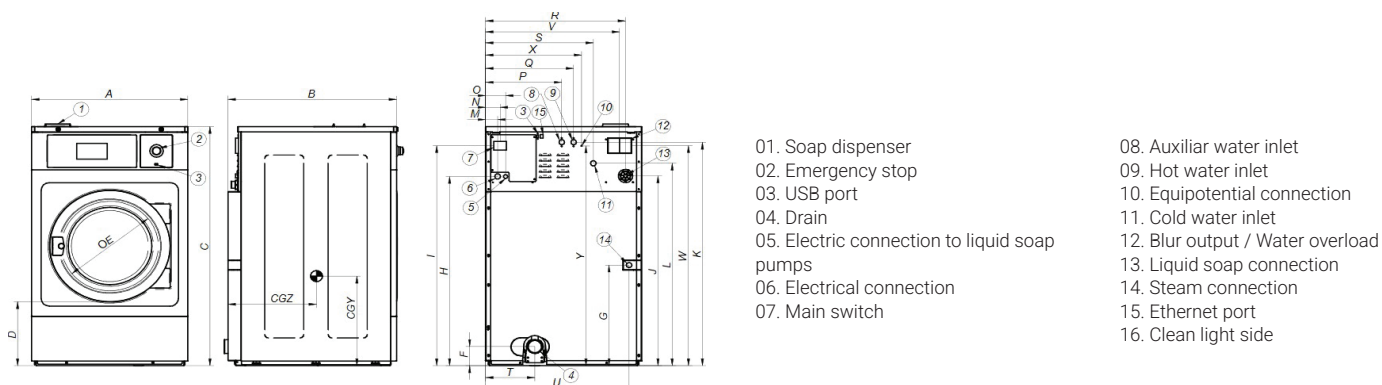

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
in	38.54	45.47	55.55	14.57	22.05	5.87	24.53	44.84	51.46	43.94	52.05	47.68	2.40	2.91	3.98	21.46	24.61	34.84	28.15	10.31	36.10	33.66	50.43	29.92	54.06	25.00	26.85



WASHING

FWS-100 TP2 100LB CAPACITY NORMAL SPIN WASHER



TOUCH PLUS CONTROL

- 7" touchscreen – intuitive and completely programmable
- USB Connection: software free of charge
- 37 languages, continually expanding
- Upload videos to display, use for ads, instructions, etc.

G-FORCE EXTRACTION

- 25-100 lb capacity washers: 200G
- 135 lb capacity washers: 150G

CONNECTIVITY

- FagorKonnnect, standard
- Provided at NO extra charge
- Manage your laundry operations from anywhere, 24/7
- Remote diagnosis and technical service
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and more

EFFICIENCY

- Low energy and water consumption
- Intelligent consumption

VERSATILITY

- Easily converts from OPL to COIN
- Electric heating < > Hot water
- Wetcleaning ready
- Extraction speed and water levels easily programmed for wetcleaning, firehouse, etc.
- Machines can be customized, made to order

ERGONOMICS & DOOR HANDLE

- Reversible doors, standard – industry exclusive
- Industry leading large doors for easy loading and unloading
- Metal door handle, commercial grade
- Door pin guide to prevent door miss locking

MAINTENANCE

- Hinged front control panel – easy and ergonomic access
- Complete technical menu
- Common parts across all models

MORE INFO

- Hard mounted washer anchoring to floor with anchoring base
- Stainless steel front and top panels
- 3 water inlets
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- CB & WRAS approved product Option ETL

OPTIONS


- Anchoring base
- Auto unlock kit for door (in case of power failure) – recommended for vended laundries
- Silicon gasket
- Relay card with 6 extra dosing signals: up to 14 signals
- 5 Extra dosing pumps
- Dosing pump kit available
- Normally closed drain valve
- Double drain kit
- Sluice – Drum
- Tropicalized model: protected board
- Steam kit available
- Maritime (oil rigs) electric models available
- Coin/token kit

TECHNICAL DATA

NORMAL SPIN WASHER | FWS-100 TP2

FWS-100 TP2			
DRUM			
Load capacity	lbs	100	
Volume	cu. ft.	15.9	
Diameter	in	33.8	
Depth	in	28.3	
GENERAL DETAILS			
Washing speed / spinning speed	r.p.m.	45 / 644	
G Factor	-	200	
Coin laundry version	-	Yes	
Double drain	-	Opt	
Weighing System / Tilting System	-	No	
DOOR			
Height center door / Height door	in	28.9 / 17.3	
Diameter	in	22	
POWER			
Motor Power Consumption	hp	8.05	
CONNECTIONS		Electric Heating	Hot Water/Steam
Voltage 208-240/60/1~ + G	FLA/A	-	-
Voltage 208-240/60/3~ + G	FLA/A	58.5/80	21.8/30
Voltage 440-480/3~ + G	FLA/A	-	11.1/20
Steam inlet (Steam model)	in	3/4"	
Water inlet	in	3/4"	
Water main pressure	Kg/cm ²	2-4	
Maximum Water Consumption	Gal	67.78*	
Drain	in	3"	
Drainage capacity	Gal/min	52.8	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	in	38.54 / 43	
Net depth / Gross depth	in	52.17 / 57	
Net height / Gross height	in	55.55 / 67	
Net weight / Gross weight	lbs	1,323 / 1,468	

* Programme No. 20, 75% load

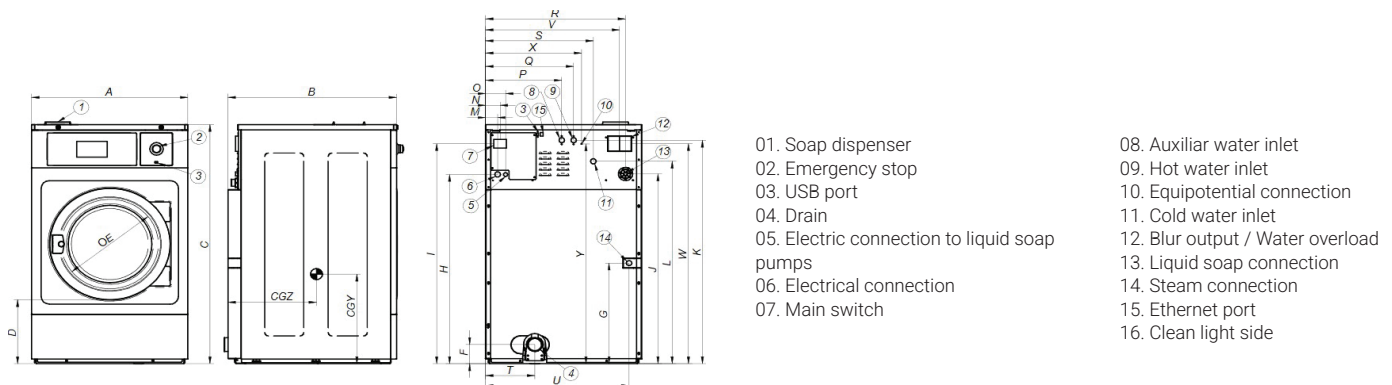

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
in	38.54	52.17	55.55	14.57	22.05	6.06	24.53	44.84	51.46	43.94	52.05	47.68	2.40	2.91	3.98	21.46	24.61	34.84	28.15	10.31	36.10	33.66	50.43	29.92	54.06	25.00	29.92



WASHING

FWS-135 TP2 135LB CAPACITY NORMAL SPIN WASHER



TOUCH PLUS CONTROL

- 7" touchscreen – intuitive and completely programmable
- USB Connection: software free of charge
- 37 languages, continually expanding
- Upload videos to display, use for ads, instructions, etc.

G-FORCE EXTRACTION

- 25-100 lb capacity washers: 200G
- 135 lb capacity washers: 150G

CONNECTIVITY

- FagorKonnnect, standard
- Provided at NO extra charge
- Manage your laundry operations from anywhere, 24/7
- Remote diagnosis and technical service
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and more

EFFICIENCY

- Low energy and water consumption
- Intelligent consumption

VERSATILITY

- Easily converts from OPL to COIN
- Electric heating < > Hot water
- Wetcleaning ready
- Extraction speed and water levels easily programmed for wetcleaning, firehouse, etc.
- Machines can be customized, made to order

ERGONOMICS & DOOR HANDLE

- Reversible doors, standard – industry exclusive
- Industry leading large doors for easy loading and unloading
- Metal door handle, commercial grade
- Door pin guide to prevent door miss locking

MAINTENANCE

- Hinged front control panel – easy and ergonomic access
- Complete technical menu
- Common parts across all models

MORE INFO

- Hard mounted washer anchoring to floor with anchoring base
- Stainless steel front and top panels
- 3 water inlets
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- CB & WRAS approved product Option ETL

OPTIONS


- Anchoring base
- Auto unlock kit for door (in case of power failure) – recommended for vended laundries
- Silicon gasket
- Relay card with 6 extra dosing signals: up to 14 signals
- 5 Extra dosing pumps
- Dosing pump kit available
- Normally closed drain valve
- Double drain kit
- Sluice – Drum
- Tropicalized model: protected board
- Steam kit available
- Maritime (oil rigs) electric models available
- Coin/token kit

TECHNICAL DATA

NORMAL SPIN WASHER | FWS-135 TP2

FWS-135 TP2			
DRUM			
Load capacity	lbs	135	
Volume	cu. ft.	20.8	
Diameter	in	41.2	
Depth	in	26.9	
GENERAL DETAILS			
Washing speed / spinning speed	r.p.m.	42.5 / 505	
G Factor	-	150	
Coin laundry version	-	Yes	
Double drain	-	Opt	
Weighing System / Tilting System	-	No	
DOOR			
Height center door / Height door	in	35.4 / 21.2	
Diameter	in	22	
POWER			
Motor Power Consumption	hp	7.36	
CONNECTIONS		Electric Heating	Hot Water/Steam
Voltage 208-240/60/1~ + G	FLA/A	-	-
Voltage 208-240/60/3~ + G	FLA/A	98.7/125	24.0/30
Voltage 440-480/3~ + G	FLA/A	-	22.5/30
Steam inlet (Steam model)	in	3/4"	
Water inlet	in	1"	
Water main pressure	Kg/cm ²	2-4	
Maximum Water Consumption	Gal	165.87*	
Drain	in	3"	
Drainage capacity	Gal/min	52.8	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	in	48.23 / 53	
Net depth / Gross depth	in	51.77 / 57	
Net height / Gross height	in	64.57 / 73	
Net weight / Gross weight	lbs	1,746 / 1,936	

* Programme No. 2, 100% load

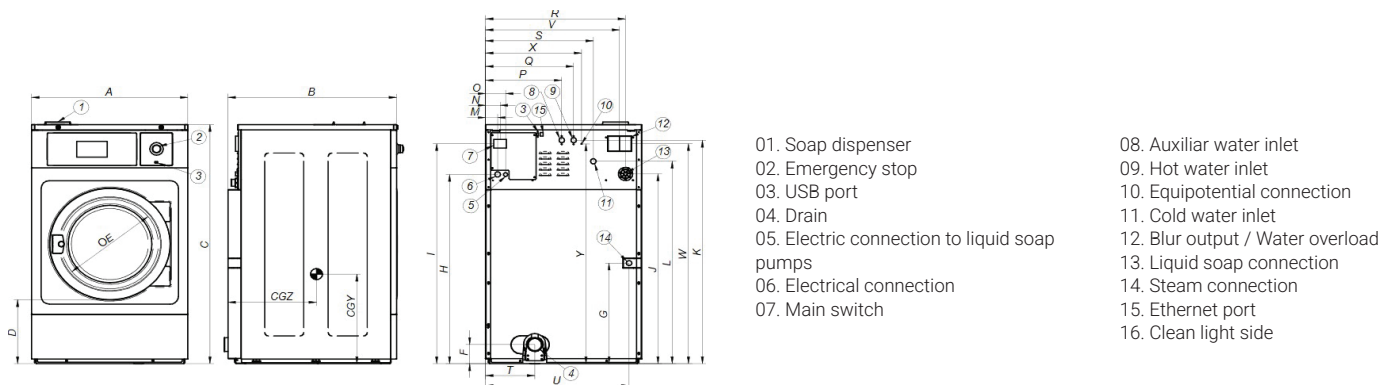

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
in	48.23	51.77	64.57	21.26	22.05	4.53	38.74	53.86	60.47	51.42	61.06	51.89	2.40	2.91	3.98	25.63	28.78	43.70	34.21	12.52	45.79	42.52	57.87	39.06	62.80	25.35	38.27