



PROFESSIONAL LAUNDRY

Perfect for restaurants, salons, gyms, campgrounds, vended laundries, drycleaners, daycare centers, and any business with limited space, that requires the performance of industrial laundry equipment.



FAGOR 

LAP-0820 / LAP-1025 PROFESSIONAL WASHERS HIGH SPIN

CHARACTERISTICS

OUTSTANDING FEATURES

- Soft Mount for easy installation
- Programmable G FACTOR up to 450G
- User-friendly, programmable TOUCH II microprocessor with a 4.3" touch screen
- 8 dosing signals standard, 6 addl optional
- 2 water inlets
- USB Connection: PC software free of charge
- Remote communication ready
- Payment system ready
- Short washing cycles (Heating Power 6 kW)

EFFICIENCY

- Significant water savings, automatically adjusts water and chemicals
- Up to 450G-force extraction, fully programmable
- Reduces drying time and saves energy

CONNECTIVITY

- FagorKonnect – Manage your laundry operations, from anywhere, at anytime 24/7
- Provided at NO extra charge

VERSATILITY

- Easily converts from OPL to COIN
- PUMP ↔ DRAIN VALVE
- Wetcleaning ready, adjust water levels and speed

ROBUSTNESS

- Outer casing in stainless steel
- Robust aluminium door
- AISI-304 stainless steel inner/outer drum and ribs
- No inner drum seal (muffle), easy to repair and clean
- Industrial housing and bearings
- 15,000+ cycles
- Same motor & inverter as Fagor industrial washers
- Heavy duty door lock

MORE INFO

- Free standing washers (leveling feet included)
- Loading Aid feature: water and rotation control
- Frequency inverter to control imbalances
- CE, WRAS and ETL approved

DISPENSER OPTIONS

- Detergent dispenser with 4 compartments
- Top load dispenser

OPTIONS


- Auto unlock kit for door (in case of power failure) – recommended for vended laundries
- Double drain
- Drain-pump kit
- Silicon gasket
- Reversible door opening
- Relay card with 6 extra dosing signals: up to 14 signals
- DomusConnect communication kit
- Normally closed drain valve
- Plinth for better ergonomics
- Plinth for mops, with filter (only valve models)
- Plinth for water recovery (tank included)
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit

TECHNICAL DATA			LAP-0820 TP2 V	LAP-0820 TP2 P	LAP-1025 TP2V	LAP-1025 TP2 P
DRUM						
Capacity	lb	20	20	20	25	25
Diameter	in	20.95	20.95	20.95	20.95	20.95
Depth	in	14.17	18.17	16.73	16.73	16.73
GENERAL DETAILS						
Washing speed / Spinning speed	r.p.m.	50/ 1.250	50/ 1.250	50/ 1.250	50/ 1.250	50/ 1.250
G Force Extraction		Up to 450G	Up to 450G	Up to 450G	Up to 450G	Up to 450G
Vended / OPL		Yes	Yes	Yes	Yes	Yes
Double drain		Yes	No	Yes	Yes	No
Weighing system / tilting system		No	No	No	No	No
DOOR						
Height center door / Height base door	in	21.15/11	21.15/11	21.15/11	21.15/11	21.15/11
Diameter	in	14.69	14.69	14.69	14.69	14.69
POWER						
Motor	kW	0.75	0.75	0.75	0.75	0.75
Electric heating power	kW	6	6	6	6	6
Max. power electric model	kW	6.25	6.25	6.25	6.25	6.25
Max. power HW model	kW	0.75	0.75	0.75	0.75	0.75
CONNECTIONS		Elec Heating / Hot Water	Elec Heating / Hot Water	Electric Heating / Hot Water	Electric Heating / Hot Water	Electric Heating / Hot Water
110V / 50-60Hz/1	FL Amp	NA / 10A	NA / 10A	NA / 10A	NA / 10A	NA / 10A
230V / 50-60Hz/3	FL Amp	20A / NA	20A / NA	20A / NA	20A / NA	20A / NA
230V / 50-60Hz/1	FL Amp	40A / 6A	40A / 6A	40A / 6A	40A / 6A	40A / 6A
Water inlet	in	3/4"	3/4"	3/4"	3/4"	3/4"
Drain	in	2"	1" (pump)	2"	2"	1" (pump)
DIMENSIONS / PACKING DIMENSIONS						
Width	in	26.63/28	26.63/28	26.63/28	26.63/28	26.63/28
Depth	in	27.48/33	27.48/33	29.25/33	29.25/33	29.25/33
Height	in	40.94/44.5	40.94/44.5	40/44.5	40/44.5	40/44.5
Net weight	lb	309	309	331	331	331

V drain valve 2" (gravity)

P drain pump

1. SOAP DISPENSER (Note: only available on top as of 10.1.2025)
2. USB PORT
3. DRAIN
4. MAIN SWITCH
5. ELECTRIC CONNECTION TO
6. LIQUID SOAP PUMPS
7. ELECTRICAL CONNECTION
8. LIQUID SOAP CONNECTION
9. COLD WATER INLET
10. HOT WATER INLET

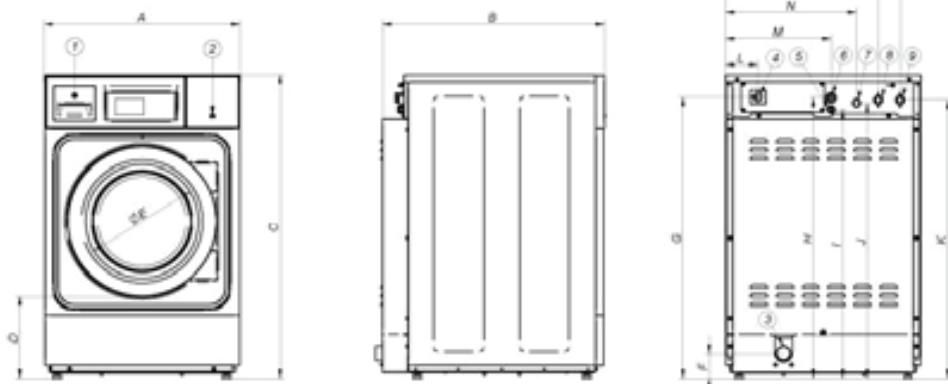

DIMENSIONS (in)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
LAP-0820 TP2 V	26.63	27.48	40	10.94	14.69	3.39	37.95	37.87	36.30	37.17	37.56	4.33	14.41	17.83	20.79	23.74	7.83
LAP-0820 TP2 P	26.63	27.48	40	10.94	14.69		37.95	37.87	36.30	37.17	37.56	4.33	14.41	17.83	20.79	23.74	
LAP-1025 TP2 V	26.63	29.25	40	10.94	14.69	3.39	37.95	37.87	36.30	37.17	37.56	4.33	14.41	17.83	20.79	23.74	7.83
LAP-1025 TP2 P	26.63	29.25	40	10.94	14.69		37.95	37.87	36.30	37.17	37.56	4.33	14.41	17.83	20.79	23.74	