



PROFESSIONAL LAUNDRY

PROFESSIONAL WASHERS HIGH SPIN LAP-0820 / LAP-1025

Perfect for restaurants,
salons, gyms, campgrounds,
vended laundries, drycleaners,
nurseries, and any business
with limited space, that requires
the performance of industrial
laundry equipment.



OUTSTANDING FEATURES

- Soft Mount for easy installation
- Programmable G FACTOR up to 450G
- User-friendly, programmable TOUCH II microprocessor with a 4.3" touch screen
- 8 dosing signals standard
- 2 water inlets
- USB Connection: PC software, no fee
- Remote communication ready
- Payment system ready
- Short washing cycles (Heating Power 6 kW)

EFFICIENCY

- Significant water savings, automatically adjusts water and chemicals
- Up to 450G-force extraction, fully programmable
- Reduces drying time and saves energy

CONNECTIVITY

- FagorKconnect – Manage your laundry operations, from anywhere, at anytime 24/7
- Provided at NO extra charge

VERSATILITY

- Easily converts from OPL to COIN
- ELECTRIC ↔ HOT WATER
- PUMP ↔ DRAIN VALVE
- SINGLE ↔ STACKED
- Wetcleaning ready, adjust water levels and speed

ROBUSTNESS

- Outer casing in stainless steel
- Robust aluminium door
- AISI-304 stainless steel inner/outer drum and ribs
- No inner drum seal (muffle), easy to repair and clean
- Industrial housing and bearings
- 15,000+ working hours
- Same motor & inverter as DOMUS industrial washers
- Heavy duty door lock

MORE INFO

- Free standing washers (leveling feet included)
- Loading Aid feature: water and rotation control
- Frequency inverter to control imbalances
- CE, WRAS and ETL approved

DISPENSER OPTIONS

- Detergent dispenser with 4 compartments
- Top Load – recommended for vended laundries
- Front Load – for stacked configurations


OPTIONS

- Auto unlock kit for door (in case of power failure) – recommended for vended laundries
- Double drain
- Drain-pump kit
- Silicon gasket
- Reversible door opening
- Relay card with 6 extra dosing signals: up to 14 signals
- DomusConnect communication kit
- Normally closed drain valve
- Plinth for better ergonomics
- Plinth for mops, with filter (only valve models)
- Plinth for water recovery (tank included)
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit

Specifications for Professional Washers LAP-0820 / LAP-1025

TECHNICAL DATA

	UNID.	LAP-0820 TP2 V	LAP-0820 TP2 P	LAP-1025 TP2 V	LAP-1025 TP2 P
DRUM					
Load capacity (KG) 1:9 / 1:10	lb	20/18	20/18	24/22	21/22
Volume	CU.FT	3	3	4	4
Diameter	in	20.95	20.95	20.95	20.95
Depth	in	14.17	18.17	16.73	16.73
GENERAL DETAILS					
Washing speed / Spinning speed	r.p.m.	50/ 1.250	50/ 1.250	50/ 1.250	50/ 1.250
G Factor	-	450	450	450	450
Self service version	-	SI	SI	SI	SI
Double drain	-	SI	No	SI	No
Weighing system / tilting system	-	No	No	No	No
DOOR					
Height center door / Height base door	in	21.15/11	21.15/11	21.15/11	21.15/11
Diameter	in	14.69	14.69	14.69	14.69
DYNAMIC FORCE					
Static Load	KN	1,4	1,4	1,5	1,5
Maximum Dynamic load	KN	0,5	0,5	0,6	0,6
Vertical maximum load	KN	0,64	0,64	0,75	0,75
Max revolutions	r.p.m.	1.250	1.250	1.250	1.250
Frequency of dynamic load	-	18,33	18,33	18,33	18,33
POWER					
Motor	HP	1	1	1	1
Electric heating	kW	6	6	6	6
Hot water heating	kW	0	0	0	0
Max. power electric model	kW	6.25	6.25	6.25	6.25
Max. power HW model	kW	0.75	0.75	0.75	0.75
Max. power steam	kW	No	No	No	No
CONNECTIONS					
Water inlet	in	3/4"	3/4"	3/4"	3/4"
Drain	mm/in	2"	1" (Bomba)	2"	1" (Bomba)
DIMENSIONS / PACKING DIMENSIONS					
Width / width	in	26.77/28	26.77/28	26.77/28	26.77/28
Depth / Depth	in	27.4/33	27.4/33	30.39/33	30.39/33
Height / height	in	41/44.5	41/44.5	41/44.5	41/44.5
Net weight / Gross weight	lb	309/331	309/331	309/331	311/352

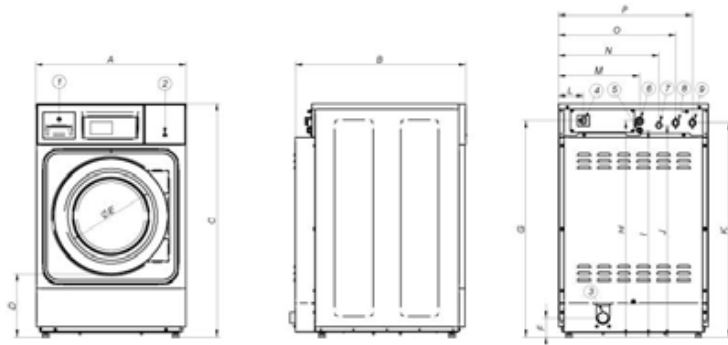

- 01. Soap dispenser
- 02. USB port
- 03. Drain
- 04. Main switch
- 05. Electric connection to liquid soap pumps
- 06. Electrical connection
- 07. Liquid soap inlet
- 08. Cold water inlet
- 09. Hot water inlet
- 10. Plinth height 389 mm

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
LAP-0820 TP2 V	26,77	27,48	40,94	10,94	14,69	3,39	37,95	37,87	36,30	37,17	37,56	4,33	14,41	17,83	20,79	23,74	7,83
LAP-0820 TP2 P	26,77	27,48	40,94	10,94	14,69		37,95	37,87	36,30	37,17	37,56	4,33	14,41	17,83	20,79	23,74	
LAP-1025 TP2 V	26,77	30,39	40,94	10,94	14,69	3,39	37,95	37,87	36,30	37,17	37,56	4,33	14,41	17,83	20,79	23,74	7,83
LAP-1025 TP2 P	26,77	30,39	40,94	10,94	14,69		37,95	37,87	36,30	37,17	37,56	4,33	14,41	17,83	20,79	23,74	