



SRP-08-10 COMPACT SERIES PROFESSIONAL DRYERS



01. MORE FEATURES

- M PROGRAMMER: selection of time and temperature, user friendly and versatile (OPL or coin laundry version).
- Electric 6,75 kw heating, optional 4,5 kw (for low power installations).
- Cool Down: anti-wrinkle at the end of the cycle.
- CE approved product.

02. MORE ROBUSTNESS


- Outer casing in grey skinplate; galvanized drum.
- Robust aluminum big door with the same door lock and seal used in the industrial range.
- Largest door diameter on the market in its segment (552 mm). Easy loading and unloading of laundry.
- Drawer type stainless steel fluff filter: not in the door but as a specific drawer.
- Industrial fan and powerful air flow.
- Sturdy construction of the dryer structure and panels.

03. MORE VERSATILITY

- OPL ↔ COIN
Standard models Convertible from self-service (coin, central payment, etc.) to OPL and vice versa.
- SINGLE ↔ STACKED
Models can be stacked on top of a washer or on another dryer. Control panels can be assembled between both drums for better ergonomics.
- Ideal for multiple solutions: hotels, hostels, campings, coin laundries, facility services (mops), gyms, etc.

04. MORE EFFICIENCY

- Reduced drying times (less than 45 minutes).
- Industrial fan that provides an optimum powerful air flow (axial type).
- Big drawer type fluff filter: increases efficiency of the whole drying process thanks to improved air flow, ergonomics and facilitates cleaning.
- Efficiency driven design.

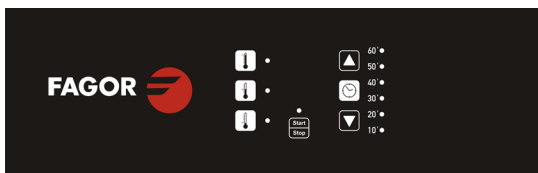

M PROGRAMMER

OPTIONS


- Plinth for better ergonomics.
- Stainless steel drum.
- Stainless steel outer casing.
- Console for an advanced programming of the "M control".
- Marine voltage 440V III 50/60 Hz No neutral.
- Voltage 230 V I/III 60 Hz.
- Voltage 110V 60 Hz.
- Coin /token kit.



www.fagorcommercial.com

TECHNICAL DATA

	UNIT.	SRP-08	SRP-10
CAPACITY & DRUM			
Capacity 1:20	lbs FAGOR COMMER-	20	25
Volume (litres)	gl	42	53
Drum diameter Ø	inch	23.22"	23.22"
Drum depth	inch	23.03"	27.16"
DOOR			
Height center door	inch	21.45"	21.45"
Height base door	inch	9.84"	9.84"
Door diameter	inch	23.14"	23.14"
GENERAL DETAILS			
M control	-	Electronic	Electronic
Construction	-	Skinplate panels	Skinplate panels
Plinth	-	OPT	OPT
Coin laundry version	-	Yes	Yes
Noise level	dB	62	62
POWER			
Motor	kW	0,37	0,37
Electric heating	kW	6,75 / 4,5	6,75 / 4,5
CONNECTIONS			
Fume exhaust Ø	inch	3.93"	3.93"
Maximum air ow	cfm	176.57	176.57
DIMENSIONS / PACKING DIMENSIONS			
Width	inch	26.77" / 27.95"	26.77" / 27.95"
Depth	inch	28.42" / 32.75"	29.72" / 32.75"
Height	inch	41.57" / 44.92"	41.57" / 44.92"
Net weight / Gross weight	lbs	196.21 / 222.67	205.03 / 229.28

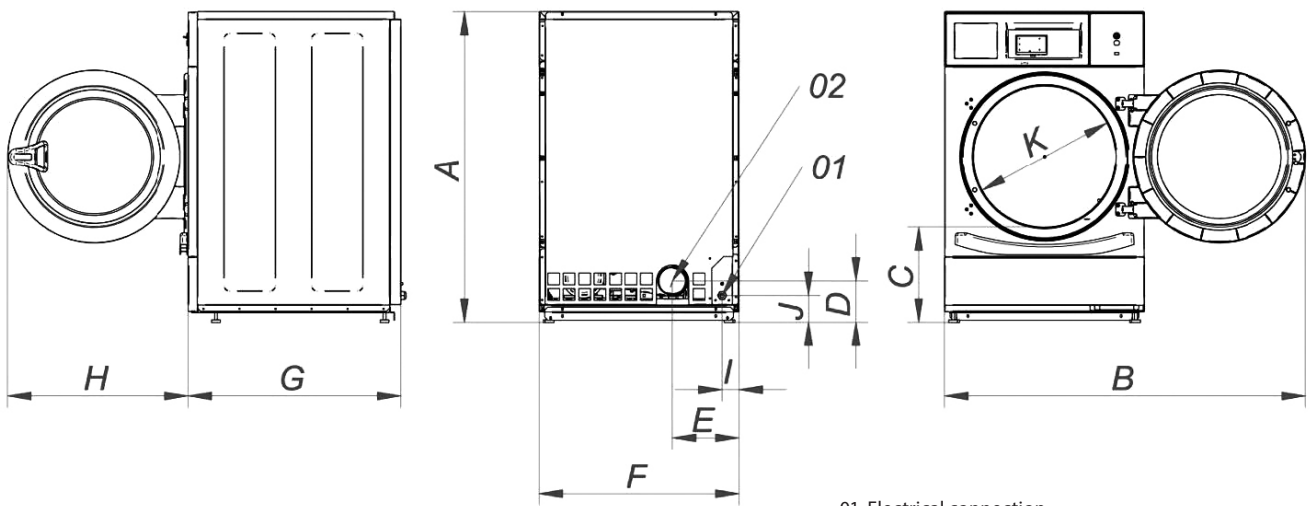

	A	B	C	D	E	F	G	H	I	J	K
SRP-08	41.57"	48.30"	12.59"	5.51"	8.89"	26.77"	28.42"	24.21"	2.44"	3.58"	18.89"
SRP-10	41.57"	48.30"	12.59"	5.51"	8.89"	26.77"	28.42"	24.21"	2.44"	3.58"	18.89"

