



Catalogue
LAUNDRY
Chapter
WASHING MACHINES

Model
LBS-100 TP2 E 400V 3N 50/60Hz

19072295

18/02/2020

SANITARY BARRIER WASHER EXTRACTOR PULLMAN,LBS-100 TP2 E


- Pullman-type axial separation drum, 2 compartments..
- New TP2 processor with two 7" screens, a touch screen for programming on the dirty linen loading side, and an information screen on the unloading side in the clean zone.
- External steel casing with grey coating (skinplate), stainless steel, easy to clean finish..
- 29 programs pre-set from factory.
- 3 water inlets.
- 8 signals for automatic liquid dosing, programmable in time and delay. 6 extra signals available optionally.
- Optimum load. Intelligent weighing system.
- Possibility of configuring three levels of savings.
- Loading and unloading doors. Door locks with safety opening.
- Automatic drum positioning with motor brake to facilitate the loading and unloading operation. Loading height: 960 mm.
- Electrical part to the left, mechanical to the right, connections at the top.
- Central drain.
- Technical menu. Statistics, alarms, autotest, data recovery for technicians and maintenance.
- Motor with variable-frequency drive incorporated.
- Prepared for Wet cleaning.
- Requires compressed air supply.
- Electric heating version
- 2 drum compartments with a single 900x500 mm useful opening door

OPTIONS:

- 6 extra dosage signals (XD)
- Titration Valve (TV)
- Stainless Steel Case (SSC)
- Traceability device (TZ)
- "- Wooden Maritime Packaging (WM)
- "

DIMENSIONS

X Width	1677 mm	X Gross width	1900 mm
Y Depth	1344 mm	Y Gross depth	1500 mm
Z Height	1960 mm	Z Gross height	2230 mm
Net Weight	1,900,0 kg	Gross Weight	1,958,0 kg
Net volume	4,420 m3	Gross volume	6,356 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Engine power	15,00 kW
Electric power	75,000 kW
Amperage (A)	125A
Heating power	60,00 kW
Voltage	400V - 3N
Electric frequency	50/60Hz

WATER TECHNICAL SPECIFICATIONS

Pressure	H2O: 200-400kPa(2-4bar)
Water max consumption	900,00 L/h

CONNECTIONS TECHNICAL SPECIFICATIONS

230 V three-phase wiring	4 X 35 / 160 A
Three-phase +N 400V wiring	5 X 25 / 125A
Water inlet diameter	1-1/4"
Drain 1 diameter	2X3"
Drainage capacity	320 l/min

OTHERS

Load capacity 1/9	100,00 kg
Load capacity 1/10	90,00 kg
Drum volume	900 L
Drum diameter	1050 mm
Drum depth	1032 mm
Drum compartments	2
Wash speed	45,0 r.p.m.
Max revolutions	750 r.p.m.
G Factor	325
Frequency of dynamic load (Hz)	13,00
Noise level	73,00 dB




Catalogue
LAUNDRY

Chapter
WASHING MACHINES

Model
LBS-100 TP2 E 400V 3N 50/60Hz

19072295

18/02/2020

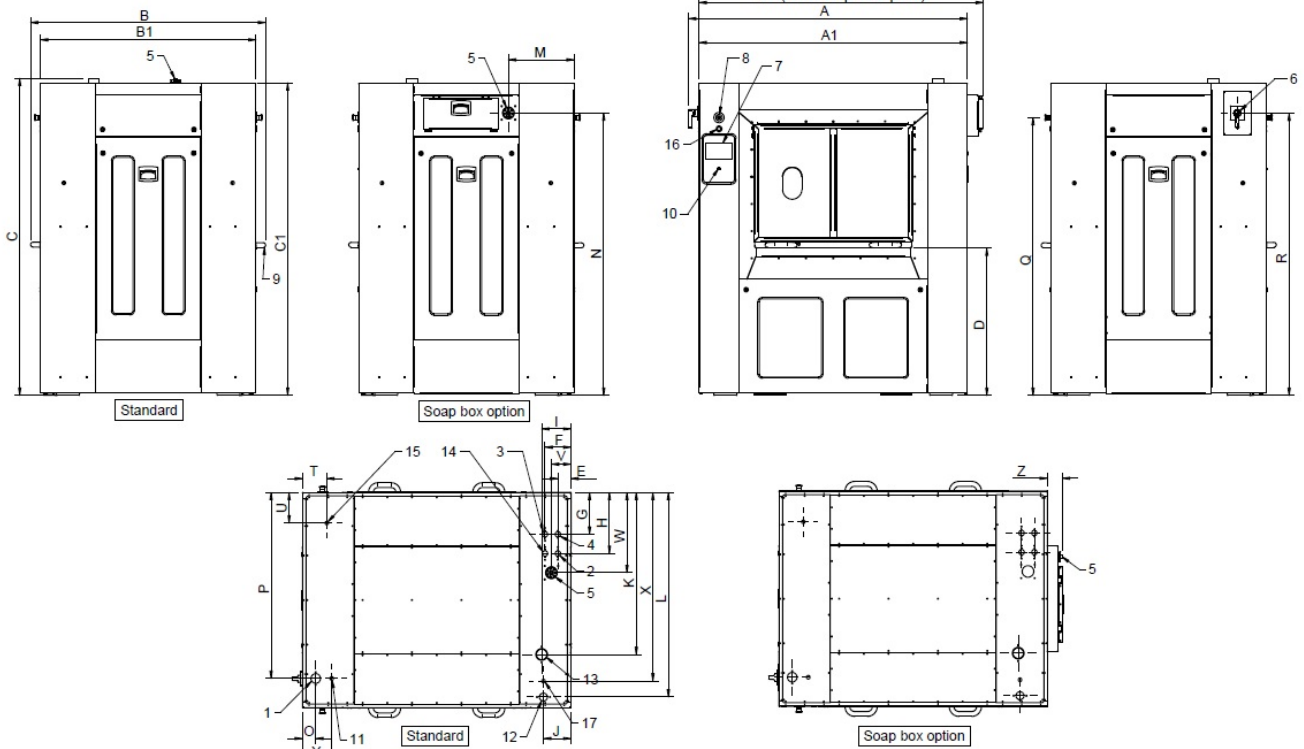

- 1 Conexión eléctrica
- 2 Agua fría
- 3 Agua descalcificada
- 4 Agua caliente
- 5 Entrada de productos líquidos
- 6 Interruptor general
- 7 Panel de control
- 8 Para de emergencia
- 9 Apertura de puerta
- 10 Puerto USB
- 11 Conexión bomba dosificadora
- 12 Entrada de vapor
- 13 Salida de vahos
- 14 Jabonera
- 15 Conexión de aire comprimido
- 16 Rotación manual del tambor
- 17 Aire comprimido válvula vapor

- 1 Connexion électrique
- 2 Eau froide
- 3 Eau adoucie
- 4 Eau chaude
- 5 Entrée produits liquides
- 6 Interrupteur principal
- 7 Panneau de commande
- 8 Bouton d'arrêt d'urgence
- 9 Ouverture porte
- 10 Port USB
- 11 Connexion pompes doseuses
- 12 Entrée vapeur
- 13 Event
- 14 Eau froide pour bac à produit
- 15 Connexion air comprimé
- 16 Rotation manuelle
- 17 Air comprimé vanne vapeur

- 1 Electrical connection
- 2 Cold water inlet
- 3 Soft water inlet
- 4 Hot water inlet
- 5 Liquid products inlet
- 6 Main switch
- 7 Control panel
- 8 Emergency stop
- 9 Door opening
- 10 USB Port
- 11 Dosing pumps connection Steam
- 12 inlet
- 13 Exhaust
- 14 Cold water detergent box
- 15 Compressed air connection
- 16 Manual drum rotation
- 17 Compressed air steam valve

	A	B	C	A1	B1	C1	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z
LBS-100TP2	1742	1468	1982	1677	1346	1954	921	82	162	262	382	183	172	1013	1279	410	1766	83	1163	1737	1765	1777	150	192	122	502	1179	183	92



Catalogue
LAUNDRY
Chapter
WASHING MACHINES

Model
LBS-100 TP2 S 400V 3N 50/60Hz

19072296

18/02/2020

SANITARY BARRIER WASHER EXTRACTOR PULLMAN,LBS-100 TP2 S


- Pullman-type axial separation drum, 2 compartments..
- New TP2 processor with two 7" screens, a touch screen for programming on the dirty linen loading side, and an information screen on the unloading side in the clean zone.
- External steel casing with grey coating (skinplate), stainless steel, easy to clean finish..
- 29 programs pre-set from factory.
- 3 water inlets.
- 8 signals for automatic liquid dosing, programmable in time and delay. 6 extra signals available optionally.
- Optimum load. Intelligent weighing system.
- Possibility of configuring three levels of savings.
- Loading and unloading doors. Door locks with safety opening.
- Automatic drum positioning with motor brake to facilitate the loading and unloading operation. Loading height: 960 mm.
- Electrical part to the left, mechanical to the right, connections at the top.
- Central drain.
- Technical menu. Statistics, alarms, autotest, data recovery for technicians and maintenance.
- Motor with variable-frequency drive incorporated.
- Prepared for Wet cleaning.
- Requires compressed air supply.
- Steam heating version
- 2 drum compartments with a single 900x500 mm useful opening door

OPTIONS:

- 6 extra dosage signals (XD)
- Titration Valve (TV)
- Stainless Steel Case (SSC)
- Traceability device (TZ)
- "- Wooden Maritime Packaging (WM)
- "

DIMENSIONS

X Width	1677 mm	X Gross width	1900 mm
Y Depth	1344 mm	Y Gross depth	1500 mm
Z Height	1960 mm	Z Gross height	2230 mm
Net Weight	1,900,0 kg	Gross Weight	1,958,0 kg
Net volume	4,420 m3	Gross volume	6,356 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Engine power	15,00 kW
Electric power	15,000 kW
Amperage (A)	25A
Voltage	400V - 3N
Electric frequency	50/60Hz

STEAM TECHNICAL SPECIFICATIONS

Steam consumption	34,20 kg/h
-------------------	------------

WATER TECHNICAL SPECIFICATIONS

Pressure	H2O: 200-400kPa(2-4bar)
Water max consumption	900,00 L/h

CONNECTIONS TECHNICAL SPECIFICATIONS

230 V three-phase wiring	4 X 6 / 40A
Three-phase +N 400V wiring	5 X 6/ 40A
Steam entrance diameter	3/4"
Water inlet diameter	1-1/4"
Drain 1 diameter	2X3"
Drainage capacity	320 l/min

OTHERS

Load capacity 1/9	100,00 kg
Load capacity 1/10	90,00 kg
Drum volume	900 L
Drum diameter	1050 mm
Drum depth	1032 mm
Drum compartments	2
Wash speed	45,0 r.p.m.
Max revolutions	750 r.p.m.
G Factor	325
Frequency of dynamic load (Hz)	13,00
Noise level	73,00 dB




Catalogue
LAUNDRY

Chapter
WASHING MACHINES

Model
LBS-100 TP2 S 400V 3N 50/60Hz

19072296

18/02/2020

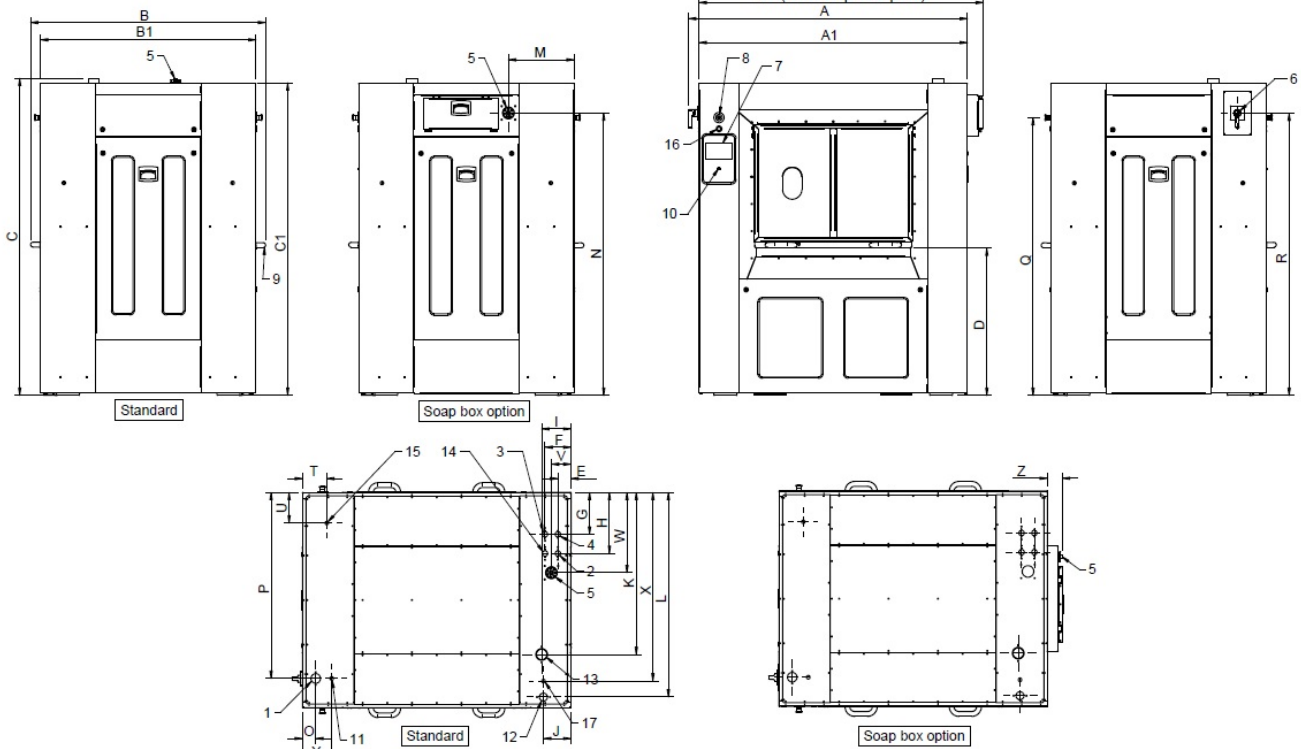

- 1 Conexión eléctrica
- 2 Agua fría
- 3 Agua descalcificada
- 4 Agua caliente
- 5 Entrada de productos líquidos
- 6 Interruptor general
- 7 Panel de control
- 8 Para de emergencia
- 9 Apertura de puerta
- 10 Puerto USB
- 11 Conexión bomba dosificadora
- 12 Entrada de vapor
- 13 Salida de vahos
- 14 Jabonera
- 15 Conexión de aire comprimido
- 16 Rotación manual del tambor
- 17 Aire comprimido válvula vapor

- 1 Connexion électrique
- 2 Eau froide
- 3 Eau adoucie
- 4 Eau chaude
- 5 Entrée produits liquides
- 6 Interrupteur principal
- 7 Panneau de commande
- 8 Bouton d'arrêt d'urgence
- 9 Ouverture porte
- 10 Port USB
- 11 Connexion pompes doseuses
- 12 Entrée vapeur
- 13 Event
- 14 Eau froide pour bac à produit
- 15 Connexion air comprimé
- 16 Rotation manuelle
- 17 Air comprimé vanne vapeur

- 1 Electrical connection
- 2 Cold water inlet
- 3 Soft water inlet
- 4 Hot water inlet
- 5 Liquid products inlet
- 6 Main switch
- 7 Control panel
- 8 Emergency stop
- 9 Door opening
- 10 USB Port
- 11 Dosing pumps connection Steam
- 12 inlet
- 13 Exhaust
- 14 Cold water detergent box
- 15 Compressed air connection
- 16 Manual drum rotation
- 17 Compressed air steam valve

	A	B	C	A1	B1	C1	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z
LBS-100TP2	1742	1468	1982	1677	1346	1954	921	82	162	262	382	183	172	1013	1279	410	1766	83	1163	1737	1765	1777	150	192	122	502	1179	183	92