



FD2 - 25 - 35

THE PERFECT BALANCE BETWEEN
QUALITY AND PRICE.



FEATURES

- Two drums share single exhaust pipe and single electric connection.
 - Auto-reverse Drum: the drying process is more efficient; offers better uniformity; avoiding the tangling of big pieces.
 - Frequency inverter: controls rotating speed and reverse drum action.
 - Filter drawer with wide surface and improved airflow made of stainless steel. Standard filter hole diameter is 0,3 mm. Optional 0,6 mm and 1,2 mm.
 - Outer casing in grey skin-plate, stainless steel look.
 - Stainless Steel Drum.
- 2 different ranges:
 - "MP Control" range: easy and intuitive electronic control offers a complete control of the process: possibility to select required drum speed, statistics control, technical menu, alarms, etc. 10 standard programs that can be modified.
 - "Self-Service" range: specific MP control for the self-service industry with several payment options: central payment, coin/token or with prepaid card systems.
 - Soft Touch: the stamped drum perforations make sure the liner is gently handled, lengthening the garments lifetime.
 - Mixed Flow: the system of mixed axial-radial airflow increases the efficiency of the whole drying process due to the improvement of the air-flow inside the drum.
 - Big loading door (opening of 180°).
 - Transmission of movement by gear motor (direct drive).
 - Cool Down: anti-wrinkle at the end of cycle.

.....
Models available in electric, or gas heating.

OPTIONS:

- iDRY (MP Control models only): humidity sensor that offers a precise humidity control; by this system the drying cycle will automatically stop when it reaches the set level of residual humidity.
- Fire Care System (MP Control models only).
- Back panel with air filter.
- Double door-glass.
- Stainless steel body.
- Stainless steel front panel.
- Model versions in 60 Hz.
- Marine versions 440V III 50/60 Hz
No neutral or 480V III 50/60 Hz




www.fagorcommercial.com



TECHNICAL DATA	UNIT.	FD2 - 25	FD2 - 35		
CAPACITY					
Capacity 1/18	lb	50	80		
Capacity 1/20	lb	48	75		
Hourly Output*	lb/h	79	116		
Evaporation capacity*	l/h	16,5	18,6		
DRUM					
Ø Drum	in	29.50	29.50		
Ø Door	in	22.50	22.50		
Door center height	in	21.50 / 60	21.50 / 60		
Load hole bottom height	in	10.25 / 49	10.25 / 49		
Drum length	in	18.75	29.25		
Drum volume	?	55	87		
POWER					
Drum motor power	HP	1 x 2	1 x 2		
Fan motor power	HP	.33 x 2	.33 x 2		
Electric heating power	Kw	12x2	12x2		
Total electric power (elec.model)	Kw	25,34	25,34		
Gas heating power	Kw	12x2	12x2		
Total electric power (gas model)	Kw	1,34	1,34		
CONNECTIONS		ELECTRIC.	GAS	ELECTRIC.	GAS
Tension 120 V - I / 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	in	31 / 34	31 / 34	31 / 34	31 / 34
Net Depth / Gross Depth	in	38.25 / 41.50	38.25 / 41.50	49 / 52	49 / 52
Net Height / Gross Height	in	78 / 84	78 / 84	78 / 84	78 / 84
Net weight / Gross weight	lb	260/268	260/268	290/303	290/303
OTHERS					
Max airflow	CFU	589	589	589	589
Ø Duct Size	in	8	8	8	8
Sound level	dB	64	64	64	64

* It may vary depending on the type of heating, filter cleanliness or extraction type.

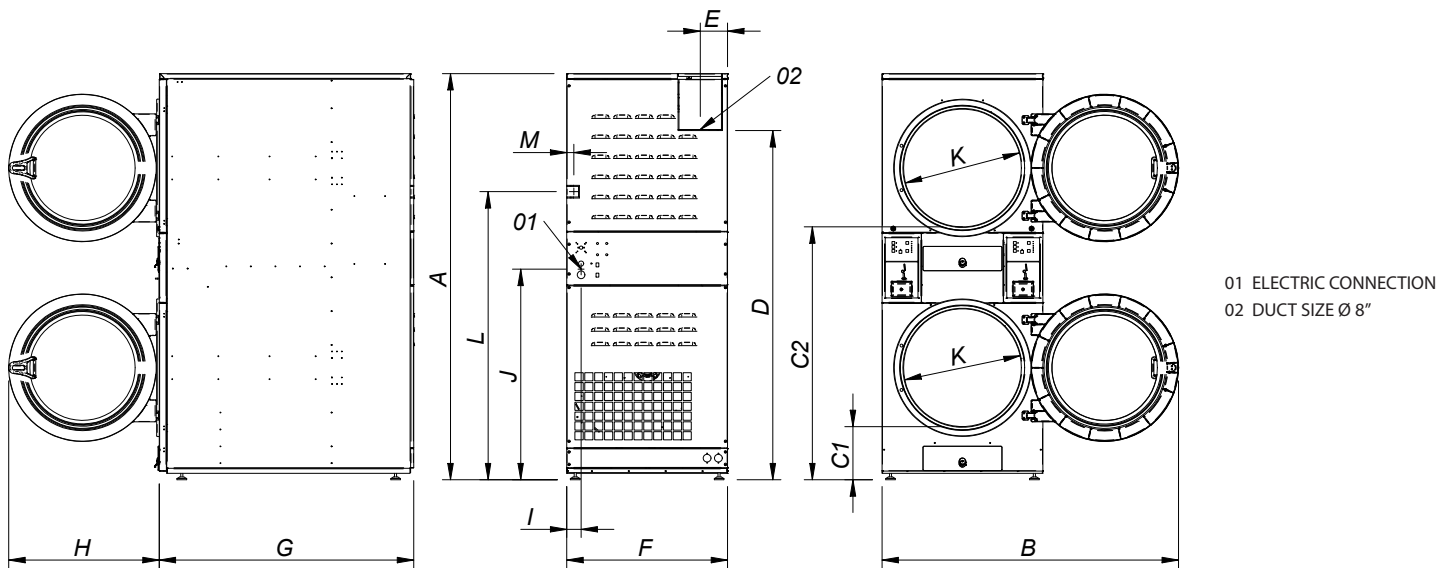

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
FD2-25	78	67	10	48.50	63.75	5.25	31	38.25	29	64	40.50	22.50	55.25	1.50
FD2-35	78	67	10	48.50	63.75	5.25	31	49	29	64	40.50	22.50	55.25	1.50





FDM2 - 25 -35

THE PERFECT BALANCE BETWEEN QUALITY AND PRICE.



FEATURES

- Two drums share single exhaust pipe and single electric connection.
- Auto-reverse Drum: the drying process is more efficient; offers better uniformity; avoiding the tangling of big pieces.
- Frequency inverter: controls rotating speed and reverse drum action.
- Filter drawer with wide surface and improved airflow made of stainless steel. Standard filter hole diameter is 0,3 mm. Optional 0,6 mm and 1,2 mm.
- Outer casing in grey skin-plate, stainless steel look.
- Stainless Steel Drum.
- 2 different ranges:
 - "MP Control" range: easy and intuitive electronic control offers a complete control of the process: possibility to select required drum speed, statistics control, technical menu, alarms, etc. 10 standard programs that can be modified.
 - "Self-Service" range: specific MP control for the self-service industry with several payment options: central payment, coin/token or with prepaid card systems.
- Soft Touch: the stamped drum perforations make sure the liner is gently handled, lengthening the garments lifetime.
- Mixed Flow: the system of mixed axial-radial airflow increases the efficiency of the whole drying process due to the improvement of the air-flow inside the drum.
- Big loading door (opening of 180°).
- Transmission of movement by gear motor (direct drive).
- Cool Down: anti-wrinkle at the end of cycle.

.....
Models available in electric, or gas heating.


OPTIONS:

- iDRY (MP Control models only): humidity sensor that offers a precise humidity control; by this system the drying cycle will automatically stop when it reaches the set level of residual humidity.
- Fire Care System (MP Control models only).
- Back panel with air filter.
- Double door-glass.
- Stainless steel body.
- Stainless steel front panel.
- Model versions in 60 Hz.
- Marine versions 440V III 50/60 Hz
No neutral or 480V III 50/60 Hz




TECHNICAL DATA	UNIT.	FDM2 - 25	FDM2 - 35		
CAPACITY					
Capacity 1/18	lb	50	80		
Capacity 1/20	lb	48	75		
Hourly Output*	lb/h	79	116		
Evaporation capacity*	l/h	16,5	18,6		
DRUM					
Ø Drum	in	29.50	29.50		
Ø Door	in	22.50	22.50		
Door center height	in	21.50 / 60	21.50 / 60		
Load hole bottom height	in	10.25 / 49	10.25 / 49		
Drum length	in	18.75	29.25		
Drum volume	?	55	87		
POWER					
Drum motor power	HP	1 x 2	1 x 2		
Fan motor power	HP	.33 x 2	.33 x 2		
Electric heating power	Kw	12x2	12x2		
Total electric power (elec.model)	Kw	25,34	25,34		
Gas heating power	Kw	12x2	12x2		
Total electric power (gas model)	Kw	1,34	1,34		
CONNECTIONS		ELECTRIC.	GAS	ELECTRIC.	GAS
Tension 120 V - I / 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	in	31 / 34		31 / 34	
Net Depth / Gross Depth	in	38.25 / 41.50		49 / 52	
Net Height / Gross Height	in	78 / 84		78 / 84	
Net weight / Gross weight	lb	260/268		290/303	
OTHERS					
Max airflow	CFU	589		589	
Ø Duct Size	in	8		8	
Sound level	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

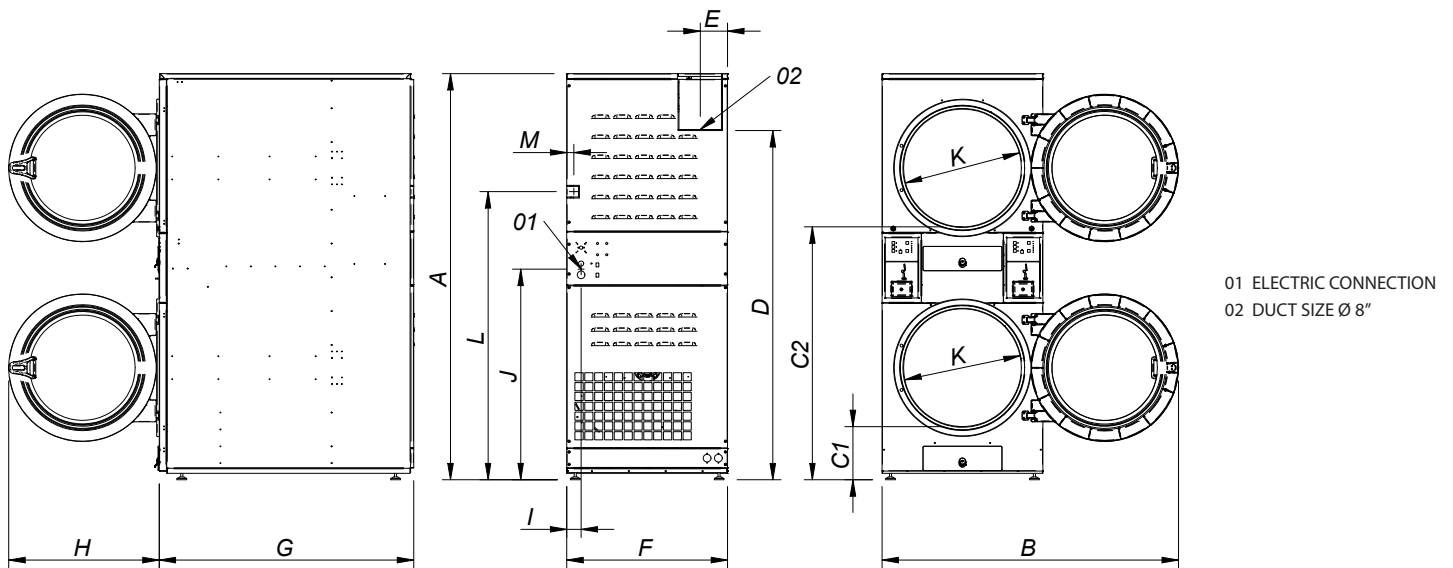

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
FDM2-25	78	67	10	48.50	63.75	5.25	31	38.25	29	64	40.50	22.50	55.25	1.50
FDM2-35	78	67	10	48.50	63.75	5.25	31	49	29	64	40.50	22.50	55.25	1.50



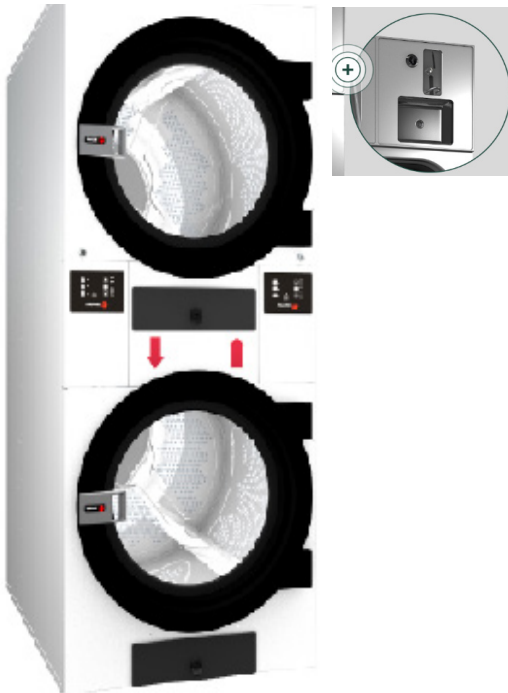

FED2 - 25 -35

THE PERFECT BALANCE BETWEEN QUALITY AND PRICE.

- Mixed Flow
- MP Control
- Autoreverse DRUM
- Stainless Steel DRUM
- SOFT TOUCH

FEATURES

- Auto-reverse Drum: the drying process is more efficient; offers better uniformity, avoiding the tangling of big pieces.
- Frequency inverter: controls rotating speed and reverse drum action.
- Filter drawer with wide surface and improved airflow made of stainless steel.
- Outer casing in galvanized steel.
- Galvanized Steel Drum.
- "M Control" range: easy to use analogic control with time and temperature selection.
- Radial airflow circuit.
- Big loading door (opening of 180°).
- Transmission of movement by gear motor (direct drive).
- Cool Down: Anti-wrinkle at the end of cycle.

.....
Models available in electric or gas heating.


OPTIONS:

- Version in 60 Hz.
- Marine versions 440V III 60 Hz No neutral or 480V III 60 Hz No



TECHNICAL DATA	UNIT.	FED2 - 25	FED2 - 35		
CAPACITY					
Capacity 1/18	lb	50	80		
Capacity 1/20	lb	48	75		
Hourly Output*	lb/h	79	116		
Evaporation capacity*	l/h	16,5	18,6		
DRUM					
Ø Drum	in	29.50	29.50		
Ø Door	in	22.50	22.50		
Door center height	in	21.50 / 60	21.50 / 60		
Load hole bottom height	in	10.25 / 49	10.25 / 49		
Drum length	in	18.75	29.25		
Drum volume	?	55	87		
POWER					
Drum motor power	HP	1 x 2	1 x 2		
Fan motor power	HP	.33 x 2	.33 x 2		
Electric heating power	Kw	12x2	12x2		
Total electric power (elec.model)	Kw	25,34	25,34		
Gas heating power	Kw	12x2	12x2		
Total electric power (gas model)	Kw	1,34	1,34		
CONNECTIONS		ELECTRIC.	GAS	ELECTRIC.	GAS
Tension 120 V - I / 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	in	31 / 34		31 / 34	
Net Depth / Gross Depth	in	38.25 / 41.50		49 / 52	
Net Height / Gross Height	in	78 / 84		78 / 84	
Net weight / Gross weight	lb	260/268		290/303	
OTHERS					
Max airflow	CFU	589		589	
Ø Duct Size	in	8		8	
Sound level	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

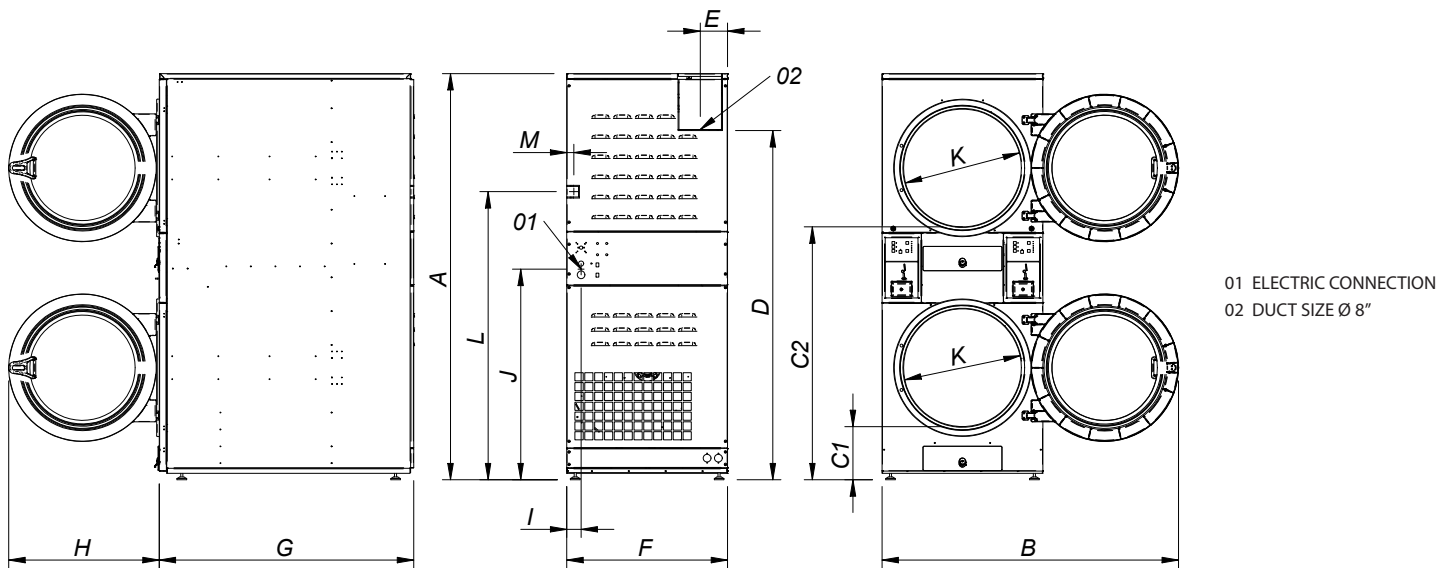

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
FED2-25	78	67	10	48.50	63.75	5.25	31	38.25	29	64	40.50	22.50	55.25	1.50
FED2-35	78	67	10	48.50	63.75	5.25	31	49	29	64	40.50	22.50	55.25	1.50

