



PSE-20-140

THE LATEST FEATURES
AND TECHNOLOGY AT YOUR
SERVICE



Drying



Ironing



CHARACTERISTICS

- Wall mount: Frontal feeding and reception.
- Electric heating.
- Electronic Microprocessor with 7 pre-set speeds.
- A Ø 8" inches (200 mm) roller in polished steel.
- Length 55" inches (1,400 mm).
- Motor with variable-frequency drive.
- Automatic cooling to 176°F (80 °C.)
- Nomex quality feeding and ironing belts.
- Easy access to all components on both sides of the machine
- Basic connections : electrical connection and air extraction
- Panels in skinplate and stainless steel.
- Double emergency stop: finger protection bar and stop push button above the control panel.
- 2 thermostats against overheating.
- Space saver, suitable for most spaces

OPTIONS:

- Special voltages.


M ELECTRONIC CONTROL

Simple and user friendly with an auto mode: automatic management of the ironing speed according to the selected temperature. Digital speed and temperature display.



TECHNICAL DATA

	UNIT.	PSE-20-140
GENERAL DATA		
Theoretical production 20-25 % moisture	lb/h	26-31
Ø Roller	in	8
Useful width	in	55
Height floor-insertion straps	in	39
Operational speed	in/min	39-197
Electronic programmer	-	Yes
Number Programs	Nº	7
Lengthwise folder	Nº	No
Electrical Connection 230/60Hz/3~	FLA	
POWER		
Heating Power (Electric model)		
Total electrical power (Electric model)	kW	10.5
Power roller motor	kW	10.84
Power fan motor	kW	0.25
DIMENSIONS / DIMENSIONS WITH PACKAGING		
Width / Width	in	74/ 83
Depth / Depth	in	17/ 28
Height / Height	in	53/ 62
Net weight / Gross weight	lb	397/ 485
Volume	ft ³	39.19/ 89.69
OTHER		
Nº Exhaust outlet	Nº	1
Ø Exhaust outlet	mm	2.20
ir flow suction	CFM	176
Noise Level	dB	55

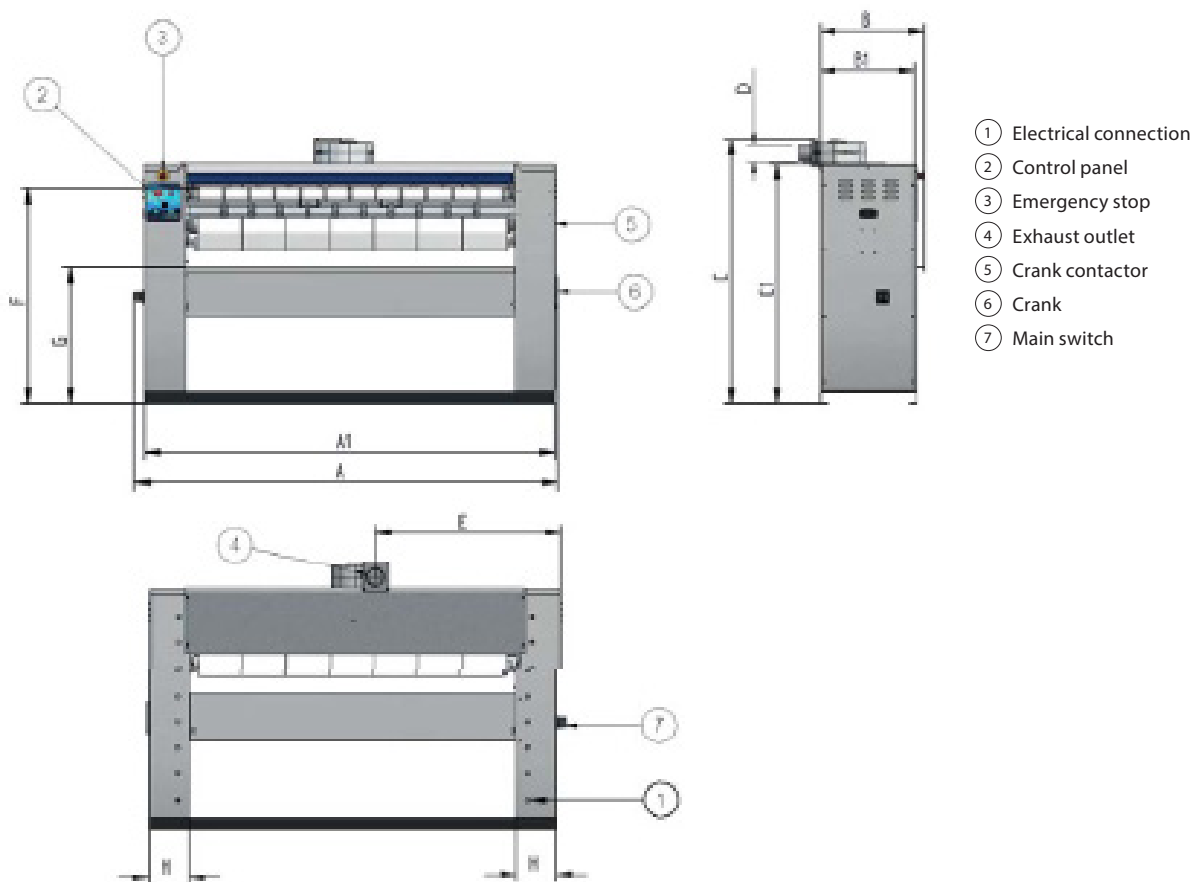

	A	B	C	A1	B1	C1	D	E	F	G	H	I
PSE-20-140	74.21	17.63	52.55	73.93	17.36	43.70	Ø 3.26	40.15	39.37	25	-	-