



REFRIGERATION





QVR-1-N



QVR-2G-N



QVF-3-N

MODEL	DOORS	SHELVES	CAPACITY (ft³)	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
REFRIGERATORS: SOLID DOORS									
QVR-1-N	1	3	24.5	2.2	1/4	115	27-1/2"	31-1/8"	79-3/8"
QVR-2-N	2	6	52.0	3.2	1/3	115	55-1/4"	31-1/8"	79-3/8"
QVR-3-N	3	9	76.0	7.5	3/4	115	81-7/8"	31-1/8"	79-3/8"
REFRIGERATORS: GLASS DOORS									
QVR-1G-N	1	3	24.5	2.2	1/4	115	27-1/2"	31-1/8"	79-3/8"
QVR-2G-N	2	6	52.0	3.2	1/3	115	55-1/4"	31-1/8"	79-3/8"
QVR-3G-N	3	9	76.0	7.5	3/4	115	81-7/8"	31-1/8"	79-3/8"
FREEZERS: SOLID DOORS									
QVF-1-N	1	3	24.5	4.3	1/2	115	27-1/2"	31-1/8"	79-3/8"
QVF-2-N	2	6	52.0	8.3	1	115	55-1/4"	31-1/8"	79-3/8"
QVF-3-N	3	9	76.0	9.5	1/2 x 2	115	81-7/8"	31-1/8"	79-3/8"

* Height does not include 4" castors (5" overall) or 6" for legs. **All specifications are subject to change without notice



Stainless-steel exterior front and sides.
Stainless-steel interior.




Reversible condenser fan and hot gas condensate management system.




Stainless-steel hinges.



Standard with 5" castors, front with brakes.



Door locks with universal key.



Ecomate (GWP) (ODP) insulation, 2-3/8" thick.



Eco-friendly R-290 Hydrocarbon refrigerant, meets DOE's Energy Conservation standards.



Meets the NSF-7 standards for food safety.



Please visit
fagorcommercial.com
for complete specifications.



Merchandise Refrigerators and Freezers

FM Series



FM-16



FMD-23



FMD-49




FMD-72

MODEL	DOORS	SHELVES	CAPACITY (ft³)	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
MERCHANDISERS: SWING DOORS REFRIGERATORS									
FM-16	1	4	16	2.2	1/4	115	27"	26-7/8"	72-5/8"
FMD-23	1	4	23	2.2	1/4	115	27"	32"	78-5/8"
FMD-49	2	8	49	3.2	1/3	115	54"	32"	78-5/8"
FMD-72	3	12	72	7.5	1/2	115	83"	32"	78-5/8"
MERCHANDISERS: SWING DOORS FREEZERS									
FMD-23F	1	4	23	4.3	1/2	115	27"	32"	78-5/8"

*All specifications are subject to change without notice.




Black vinyl exterior finish front, sides and back.




Interior walls NSF approved white coated steel finish.




Sturdy stainless steel floor.



LED interior lights for shadow-free illumination.



Double pane hinged glass door Refrigerators. Triple pane hinged glass door Freezers.



Ecomate (GWP) (ODP) insulation, 2" thick.



Eco-friendly R-290 Hydrocarbon refrigerant, meets DOE's Energy Conservation standards.



Meets the NSF-7 standards for food safety.



Please visit fagorcommercial.com for complete specifications.





Salad / Sandwich Prep Tables

FST Series



FST-27-8-N



FST-60-16-D2-N




FST-72-18-N

MODEL	DOORS	DRAWERS	SHELVES	CAPACITY (ft ³)	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
SALAD / SANDWICH PREP TABLES WITH DOORS										
FST-27-8-N	1	0	1	8	1.5	1/10	115	27-3/4"	30-1/8"	44-5/8"
FST-36-10-N	2	0	2	10	1.5	1/10	115	36-3/8"	30-1/8"	44-5/8"
FST-48-12-N	2	0	2	12	2.5	1/3	115	48-3/8"	30-1/8"	44-5/8"
FST-60-16-N	2	0	2	16	2.5	1/3	115	60-3/8"	30-1/8"	44-5/8"
FST-72-18-N	3	0	3	18	2.5	1/3	115	72-1/2"	30-1/8"	44-5/8"
SALAD / SANDWICH PREP TABLES WITH DOORS AND/OR DRAWERS										
FST-27-8-D2-N	0	2	0	8	1.5	1/10	115	27-3/4"	30-1/8"	44-5/8"
FST-48-12-D2-N	1	2	1	12	2.5	1/3	115	48-3/8"	30-1/8"	44-5/8"
FST-48-12-D4-N	0	4	0	12	2.5	1/3	115	48-3/8"	30-1/8"	44-5/8"
FST-60-16-D2-N	1	2	1	16	2.5	1/3	115	60-3/8"	30-1/8"	44-5/8"
FST-60-16-D4-N	0	4	0	16	2.5	1/3	115	60-3/8"	30-1/8"	44-5/8"
FST-72-18-D2-N	2	2	2	18	2.5	1/3	115	72-1/2"	30-1/8"	44-5/8"
FST-72-18-D4-N	1	4	1	18	2.5	1/3	115	72-1/2"	30-1/8"	44-5/8"
FST-72-18-D6-N	0	6	0	18	2.5	1/3	115	72-1/2"	30-1/8"	44-5/8"

* Depth does not include 1" bumper. ** Height does not include 5" casters (6" overall) or 6" optional legs.



Stainless-steel exterior front and sides.
Stainless-steel interior.



Innovative air flow underneath the pans avoids drying of products.




Interchangeable Door/Drawer System.



Exclusive base design for over 30% greater interior capacity than most in it's class.



Removable white Nylamid NSF cutting board: 10" full length.



Ecomate (GWP) (ODP) insulation, 2-3/8" thick.



Eco-friendly R-290 Hydrocarbon refrigerant, meets DOE's Energy Conservation standards.



Meets the NSF-7 standards for food safety.



Please visit
fagorcommercial.com
for complete specifications.



Mega-Top Refrigeration Prep Tables

FMT Series



FMT-27-12-D2-N



FMT-60-24-N




FMT-72-30-N

MODEL	DOORS	DRAWERS	SHELVES	CAPACITY (ft ³)	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
MEGA-TOP PREP TABLES WITH DOORS										
FMT-27-12-N	1	0	1	12	1.5	1/10	115	27-3/4"	36-1/8"	44-5/8"
FMT-36-15-N	2	0	2	15	1.5	1/10	115	36-3/8"	36-1/8"	44-5/8"
FMT-48-18-N	2	0	2	18	2.5	1/3	115	48-3/8"	36-1/8"	44-5/8"
FMT-60-24-N	2	0	2	24	2.5	1/3	115	60-3/8"	36-1/8"	44-5/8"
FMT-72-30-N	3	0	3	30	2.5	1/3	115	72-1/2"	36-1/8"	44-5/8"
MEGA-TOP PREP TABLES WITH DOORS AND/OR DRAWERS										
FMT-27-12-D2-N	0	2	0	12	1.5	1/10	115	27-3/4"	36-1/8"	44-5/8"
FMT-48-18-D2-N	1	2	2	18	2.5	1/3	115	48-3/8"	36-1/8"	44-5/8"
FMT-48-18-D4-N	0	4	0	18	2.5	1/3	115	48-3/8"	36-1/8"	44-5/8"
FMT-60-24-D2-N	1	2	2	24	2.5	1/3	115	60-3/8"	36-1/8"	44-5/8"
FMT-60-24-D4-N	0	4	0	24	2.5	1/3	115	60-3/8"	36-1/8"	44-5/8"
FMT-72-30-D2-N	2	2	4	30	2.5	1/3	115	72-1/2"	36-1/8"	44-5/8"
FMT-72-30-D4-N	1	4	2	30	2.5	1/3	115	72-1/2"	36-1/8"	44-5/8"
FMT-72-30-D6-N	0	6	0	30	2.5	1/3	115	72-1/2"	36-1/8"	44-5/8"

* Depth does not include 1" bumper. ** Height does not include 5" casters (6" overall) or 6" optional legs.



Stainless-steel exterior front and sides.
Stainless-steel interior.



Innovative air flow underneath the pans avoids drying of products.




Interchangeable Door/Drawer System.



Exclusive base design for over 30% greater interior capacity than most in it's class.



Removable white Nylamid NSF cutting board: 10" full length.



Ecomate (GWP) (ODP) insulation, 2-3/8" thick.



Eco-friendly R-290 Hydrocarbon refrigerant, meets DOE's Energy Conservation standards.



Meets the NSF-7 standards for food safety.



Please visit
fagorcommercial.com
for complete specifications.





FPT-46



FPT-67




FPT-93-D4

MODEL	DOORS	DRAWERS	SHELVES	CAPACITY (ft ³)	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
PIZZA PREP TABLES WITH DOORS										
FPT-46	1	0	2	6	3.0	1/3	115	46"	32-1/2"	43-7/8"
FPT-67	2	0	4	9	3.0	1/3	115	67-1/4"	32-1/2"	43-7/8"
FPT-93	3	0	6	12	3.0	1/3	115	93-1/8"	32-1/2"	43-7/8"
PIZZA PREP TABLES WITH DOORS AND/OR DRAWERS										
FPT-46-2D	0	2	6	6	3.0	1/3	115	46"	32-1/2"	43-7/8"
FPT-67-2D	1	2	9	9	3.0	1/3	115	67-1/4"	32-1/2"	43-7/8"
FPT-67-4D	0	4	9	9	3.0	1/3	115	67-1/4"	32-1/2"	43-7/8"
FPT-93-2D	2	2	12	12	3.0	1/3	115	93-1/8"	32-1/2"	43-7/8"
FPT-93-4D	1	4	12	12	3.0	1/3	115	93-1/8"	32-1/2"	43-7/8"
FPT-93-6D	0	6	12	12	3.0	1/3	115	93-1/8"	32-1/2"	43-7/8"

* Depth does not include 1" bumper. ** Height does not include 5" casters (6" overall) or 6" optional legs.



Stainless-steel exterior front and sides.
Stainless-steel interior.



Innovative air flow underneath the pans avoids drying of products.




Interchangeable Door/Drawer System.



Removable white Nylamid NSF cutting board: 19" full length.



Accepts 18" x 26" sheet pans



Ecomate (GWP) (ODP) insulation, 2-3/8" thick.



Eco-friendly R-290 Hydrocarbon refrigerant, meets DOE's Energy Conservation standards.



Meets the NSF-7 standards for food safety.



Please visit
fagorcommercial.com
for complete specifications.



Undercounter Refrigerators & Freezers

FUR/FUF Series



FUR-27-N



FUR-48-D2-N



FUR-72-N

MODEL	DOORS	DRAWERS	SHELVES	CAPACITY (ft³)	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
UNDERCOUNTER REFRIGERATORS WITH DOORS										
FUR-27-N	1	0	2	9.5	1.5	1/10	115	27-3/4"	30-1/8"	35-3/4"
FUR-36-N	2	0	2	13.1	1.5	1/10	115	36-3/8"	30-1/8"	35-3/4"
FUR-48-N	2	0	4	16.7	2.5	1/3	115	48-3/8"	30-1/8"	35-3/4"
FUR-60-N	2	0	4	20.6	2.5	1/3	115	60-3/8"	30-1/8"	35-3/4"
FUR-72-N	3	0	6	25.4	3.0	1/3	115	72-1/2"	30-1/8"	35-3/4"
UNDERCOUNTER REFRIGERATORS WITH DOORS AND/OR DRAWERS										
FUR-27-D2-N	0	2	0	9.5	1.5	1/10	115	27-3/4"	30-1/8"	35-3/4"
FUR-48-D2-N	1	2	2	16.7	2.5	1/3	115	48-3/8"	30-1/8"	35-3/4"
FUR-48-D4-N	0	4	0	16.7	2.5	1/3	115	48-3/8"	30-1/8"	35-3/4"
FUR-60-D2-N	1	2	2	20.6	2.5	1/3	115	60-3/8"	30-1/8"	35-3/4"
FUR-60-D4-N	0	4	0	20.6	2.5	1/3	115	60-3/8"	30-1/8"	35-3/4"
FUR-72-D2-N	2	2	4	25.4	3.0	1/3	115	72-1/2"	30-1/8"	35-3/4"
FUR-72-D4-N	1	4	2	25.4	3.0	1/3	115	72-1/2"	30-1/8"	35-3/4"
FUR-72-D6-N	0	6	0	25.4	3.0	1/3	115	72-1/2"	30-1/8"	35-3/4"
UNDERCOUNTER FREEZERS WITH DOORS										
FUF-27-N	1	0	2	9.5	2.7	1/3	115	27-3/4"	30-1/8"	35-3/4"
FUF-48-N	2	0	4	16.7	6.5	1/2	115	48-3/8"	30-1/8"	35-3/4"
FUF-60-N	2	0	4	20.6	6.5	1/2	115	60-3/8"	30-1/8"	35-3/4"


* Depth does not include 1" bumper.



Stainless-steel exterior front and sides.
Stainless-steel interior.




Interchangeable Door/Drawer System.



Exclusive base design for over 30% greater interior capacity than most in it's class.



Standard with 5" castors, front with brakes.



Ecomate (GWP) (ODP) insulation, 2-3/8" thick.



Eco-friendly R-290 Hydrocarbon refrigerant, meets DOE's Energy Conservation standards.



Meets the NSF-7 standards for food safety.



Please visit
fagorcommercial.com
for complete specifications.





Worktop Refrigerators & Freezers

FWR/FWF Series



FWR-36-N



FWF-48-N



FWR-60-D4-N

MODEL	DOORS	DRAWERS	SHELVES	CAPACITY (ft³)	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
WORKTOP REFRIGERATORS WITH DOORS										
FWR-27-N	1	0	2	9.5	1.5	1/10	115	27-3/4"	29-3/8"	39-5/8"
FWR-36-N	2	0	2	13.1	1.5	1/10	115	36-3/8"	29-3/8"	39-5/8"
FWR-48-N	2	0	4	16.7	2.5	1/3	115	48-3/8"	29-3/8"	39-5/8"
FWR-60-N	2	0	4	20.6	2.5	1/3	115	60-3/8"	29-3/8"	39-5/8"
FWR-72-N	3	0	6	25.4	2.5	1/3	115	72-1/2"	29-3/8"	39-5/8"
WORKTOP REFRIGERATORS WITH DOORS AND/OR DRAWERS										
FWR-27-D2-N	0	2	0	9.5	1.5	1/10	115	27-3/4"	30-1/8"	39-5/8"
FWR-48-D2-N	1	2	2	16.7	2.5	1/3	115	48-3/8"	30-1/8"	39-5/8"
FWR-48-D4-N	0	4	0	16.7	2.5	1/3	115	48-3/8"	30-1/8"	39-5/8"
FWR-60-D2-N	1	2	2	20.6	2.5	1/3	115	60-3/8"	30-1/8"	39-5/8"
FWR-60-D4-N	0	4	0	20.6	2.5	1/3	115	60-3/8"	30-1/8"	39-5/8"
FWR-72-D2-N	2	2	4	25.4	2.5	1/3	115	72-1/2"	30-1/8"	39-5/8"
FWR-72-D4-N	1	4	2	25.4	2.5	1/3	115	72-1/2"	30-1/8"	39-5/8"
FWR-72-D6-N	0	6	0	25.4	2.5	1/3	115	72-1/2"	30-1/8"	39-5/8"
WORKTOP FREEZERS WITH DOORS										
FWF-27-N	1	0	2	9.5	2.7	1/3	115	27-3/4"	29-3/8"	39-5/8"
FWF-48-N	2	0	4	13.1	6.5	1/2	115	48-3/8"	29-3/8"	39-5/8"
FWF-60-N	2	0	4	16.7	6.5	1/2	115	60-3/8"	29-3/8"	39-5/8"


* Depth does not include 1" bumper. ** Height does not include 5" casters (6" overall) or 6" optional legs.



Stainless-steel exterior front and sides.
Stainless-steel interior.




Interchangeable Door/
Drawer System.



Exclusive base design for over 30% greater interior capacity than most in it's class.



Standard with 5"
castors, front with brakes.



Ecomate (GWP) (ODP)
insulation, 2-3/8" thick.



Eco-friendly R-290 Hydrocarbon refrigerant, meets DOE's Energy Conservation standards.



Meets the NSF-7 standards for food safety.



Please visit
fagorcommercial.com
for complete specifications.



Deep Undercounter Refrigerators

SUR/SUR D Series



SUR-46



SUR-67-D4



SUR-93

MODEL	DOORS	DRAWERS	SHELVES	CAPACITY (ft³)	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
DEEP UNDERCOUNTER REFRIGERATORS WITH DOORS										
SUR-46	1	0	2	9.9	3.0	1/3	115	46"	32-1/2"	30"
SUR-67	2	0	4	18.6	3.0	1/3	115	67-1/4"	32-1/2"	30"
SUR-93	3	0	6	26.5	3.0	1/3	115	93"	32-1/2"	30"
DEEP UNDERCOUNTER REFRIGERATORS WITH DOORS AND/OR DRAWERS										
SUR-46-D2	0	2	2	9.9	3.0	1/3	115	46"	32-1/2"	30"
SUR-67-D2	1	2	2	18.6	3.0	1/3	115	67-1/4"	32-1/2"	30"
SUR-67-D4	0	4	4	18.6	3.0	1/3	115	67-1/4"	32-1/2"	30"
SUR-93-D2	2	2	2	26.5	3.0	1/3	115	93"	32-1/2"	30"
SUR-93-D4	1	4	4	26.5	3.0	1/3	115	93"	32-1/2"	30"
SUR-93-D6	0	6	6	26.5	3.0	1/3	115	93"	32-1/2"	30"


* Depth does not include 1" bumper. ** Height does not include 5" casters (6" overall) or 6" optional legs.



Stainless-steel exterior front and sides.
Stainless-steel interior.




Interchangeable Door/
Drawer System.



Exclusive base design
for over 30% greater
interior capacity than
most in it's class.



Standard with 5"
castors, front with
brakes.



Ecomate (GWP) (ODP)
insulation, 2-3/8" thick.



Eco-friendly R-290 Hydrocarbon
refrigerant, meets DOE's Energy
Conservation standards.



Meets the NSF-7
standards for food
safety.

Please visit
fagorcommercial.com
for complete specifications.





Deep Worktop Refrigerators SWR/SWR D Series



SWR-46



SWR-67-D4



SWR-93-D4

MODEL	DOORS	DRAWERS	SHELVES	CAPACITY (ft³)	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
DEEP WORKTOP REFRIGERATORS WITH DOORS										
SWR-46	1	0	2	9.9	3.0	1/3	115	46"	32-1/2"	34"
SWR-67	2	0	4	18.6	3.0	1/3	115	67-1/4"	32-1/2"	34"
SWR-93	3	0	6	26.5	3.0	1/3	115	93"	32-1/2"	34"
DEEP WORKTOP REFRIGERATORS WITH DOORS AND/OR DRAWERS										
SWR-46-D2	0	2	2	9.9	3.0	1/3	115	46"	32-1/2"	34"
SWR-67-D2	1	2	2	18.6	3.0	1/3	115	67-1/4"	32-1/2"	34"
SWR-67-D4	0	4	4	18.6	3.0	1/3	115	67-1/4"	32-1/2"	34"
SWR-93-D2	2	2	2	26.5	3.0	1/3	115	93"	32-1/2"	34"
SWR-93-D4	1	4	4	26.5	3.0	1/3	115	93"	32-1/2"	34"
SWR-93-D6	0	6	6	26.5	3.0	1/3	115	93"	32-1/2"	34"


* Depth does not include 1" bumper. ** Height does not include 5" casters (6" overall) or 6" optional legs.



Stainless-steel exterior front and sides.
Stainless-steel interior.




Interchangeable Door/
Drawer System.



Exclusive base design for over 30% greater interior capacity than most in it's class.



Standard with 5" castors, front with brakes.



Ecomate (GWP) (ODP) insulation, 2-3/8" thick.



Eco-friendly R-290 Hydrocarbon refrigerant, meets DOE's Energy Conservation standards.



Meets the NSF-7 standards for food safety.

Please visit
fagorcommercial.com
for complete specifications.



Refrigerated Chef Base FCBR Series



FCBR-52-60



FCBR-72



FCBR-84

MODEL	DRAWERS	PANS (GN-1/6)	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
CHEF BASES								
FCBR-52	2	36	2.5	1/10	115	53"	32"	25-3/8"
FCBR-52-60	2	36	2.5	1/10	115	60"	32"	25-3/8"
FCBR-72	4	48	3.0	1/4	115	72-1/2"	32"	25-3/8"
FCBR-84	4	60	3.0	1/4	115	84"	32"	25-3/8"
FCBR-96	4	72	3.0	1/4	115	96-5/8"	32"	25-3/8"

* Depth does not include 1" bumper / All specifications are subject to change without notice.




Stainless-steel exterior
front and sides.
Stainless-steel interior.




Heavy duty drawer
slides, full length
recessed drawer
handles.



Standard with 5"
castors, front with
brakes.



Ecomate (GWP) (ODP)
insulation, 2-3/8" thick.



Innovative airflow inside
to maintain a constant
temperature between
32 °F to 41 °F.



Eco-friendly R-290 Hydrocarbon
refrigerant, meets DOE's Energy
Conservation standards.



Meets the NSF-7
standards for food
safety.

Please visit
fagorcommercial.com
for complete specifications.





FBB-24-N




FBB-79GS-N



FBB-95-N

MODEL	DOORS	SHELVES	CAPACITY (12 oz cans)	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
BLACK VINYL FINISH BACK BAR WITH SOLID DOORS									
FBB-24-N	1	2	300	1.5	1/10	115	24-7/8"	30"	39-3/8"
FBB-36-N	1	2	430	1.5	1/10	115	36-3/4"	29"	36-7/8"
FBB-59-N	2	4	852	3.0	1/3	115	59-1/2"	29"	36-7/8"
FBB-69-N	2	4	1014	3.0	1/3	115	69-1/2"	29"	36-7/8"
FBB-79-N	3	6	1092	3.0	1/3	115	80"	29"	36-7/8"
FBB-95-N	3	6	1302	3.0	1/3	115	95-1/2"	29"	36-7/8"
BLACK VINYL FINISH BACK BAR WITH GLASS DOORS									
FBB-24G-N	1	2	300	1.5	1/10	115	24-7/8"	30"	39-3/8"
FBB-36G-N	1	2	430	1.5	1/10	115	36-3/4"	29"	36-7/8"
FBB-59G-N	2	4	852	3.0	1/3	115	59-1/2"	29"	36-7/8"
FBB-69G-N	2	4	1014	3	1/3	115	69-1/2"	29"	36-7/8"
FBB-79G-N	3	6	1092	3	1/3	115	80"	29"	36-7/8"
FBB-95G-N	3	6	1302	3	1/3	115	95-1/2"	29"	36-7/8"
STAINLESS STEEL BACK BAR WITH SOLID DOORS									
FBB-24S-N	1	2	300	1.5	1/10	115	24-7/8"	30"	39-3/8"
FBB-36S-N	1	2	430	1.5	1/10	115	36-3/4"	29"	36-7/8"
FBB-59S-N	2	4	852	3.0	1/3	115	59-1/2"	29"	36-7/8"
FBB-69S-N	2	4	1014	3.0	1/3	115	69-1/2"	29"	36-7/8"
FBB-79S-N	3	6	1092	3.0	1/3	115	80"	29"	36-7/8"
FBB-95S-N	3	6	1302	3.0	1/3	115	95-1/2"	29"	36-7/8"
STAINLESS STEEL BACK BAR WITH GLASS DOORS									
FBB-24GS-N	1	2	300	1.5	1/10	115	24-7/8"	30"	39-3/8"
FBB-36GS-N	1	2	430	1.5	1/10	115	36-3/4"	29"	36-7/8"
FBB-59GS-N	2	4	852	3.0	1/3	115	59-1/2"	29"	36-7/8"
FBB-69GS-N	2	4	1014	3.0	1/3	115	69-1/2"	29"	36-7/8"
FBB-79GS-N	3	6	1092	3.0	1/3	115	80"	29"	36-7/8"
FBB-95GS-N	3	6	1302	3.0	1/3	115	95-1/2"	29"	36-7/8"

(G) Glass door units.




Black vinyl exterior finish or full Stainless Steel.




Solid Doors or Glass Doors.



Fully front breathing for seamless fit in any space.



Complete side-mount refrigeration system.



Ecomate (GWP) (ODP) insulation, 2" thick.



Eco-friendly R-290 Hydrocarbon refrigerant, meets DOE's Energy Conservation standards.



Meets the NSF-7 standards for food safety.



Please visit
fagorcommercial.com
for complete specifications.



Back Bar Refrigeration

FBB Slim Line Series



FBB-24-36S




FBB-24-60GS



FBB-24-72S

MODEL	DOORS	SHELVES	CAPACITY (12 oz cans)	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
BLACK VINYL FINISH SLIM LINE BACK BAR WITH SOLID DOORS									
FBB-24-36	1	2	210	1.5	1/10	115	35-1/2"	24-5/8"	35-1/2"
FBB-24-48	2	4	300	2.0	1/4	115	49-5/8"	24-5/8"	35-1/2"
FBB-24-60	2	4	390	2.0	1/4	115	62-1/4"	24-5/8"	35-1/2"
FBB-24-72	3	6	540	2.0	1/4	115	72"	24-5/8"	35-1/2"
BLACK VINYL FINISH SLIM LINE BACK BAR WITH GLASS DOORS									
FBB-24-36G	1	2	210	1.5	1/10	115	35-1/2"	24-5/8"	35-1/2"
FBB-24-48G	2	4	300	2.0	1/4	115	49-5/8"	24-5/8"	35-1/2"
FBB-24-60G	2	4	390	2.0	1/4	115	62-1/4"	24-5/8"	35-1/2"
FBB-24-72G	3	6	540	2.0	1/4	115	72"	24-5/8"	35-1/2"
STAINLESS STEEL FINISH SLIM LINE BACK BAR WITH SOLID DOORS									
FBB-24-36S	1	2	210	1.5	1/10	115	35-1/2"	24-5/8"	35-1/2"
FBB-24-48S	2	4	300	2.0	1/4	115	49-5/8"	24-5/8"	35-1/2"
FBB-24-60S	2	4	390	2.0	1/4	115	62-1/4"	24-5/8"	35-1/2"
FBB-24-72S	3	6	540	2.0	1/4	115	72"	24-5/8"	35-1/2"
STAINLESS STEEL FINISH SLIM LINE BACK BAR WITH GLASS DOORS									
FBB-24-36GS	1	2	210	1.5	1/4	115	35-1/2"	24-5/8"	35-1/2"
FBB-24-48GS	2	4	300	2.0	1/4	115	49-5/8"	24-5/8"	35-1/2"
FBB-24-60GS	2	4	390	2.0	1/4	115	62-1/4"	24-5/8"	35-1/2"
FBB-24-72GS	3	6	540	2.0	1/4	115	72"	24-5/8"	35-1/2"

(G) Glass door units.




Black vinyl exterior finish or full Stainless Steel.




Solid Doors or Glass Doors.



Fully front breathing for seamless fit in any space.



Complete side-mount refrigeration system.



Ecomate (GWP) (ODP) insulation, 2" thick.



Eco-friendly R-290 Hydrocarbon refrigerant, meets DOE's Energy Conservation standards.



Meets the NSF-7 standards for food safety.



Please visit
fagorcommercial.com
for complete specifications.





Direct Draw Beer Coolers FDD Series



FDD-24-N




FDD-59-N



FDD-95S-N

MODEL	DOORS	TOWERS	TAPS	KEGS	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
BLACK VINYL DIRECT DRAW										
FDD-24-N	1	1	1	1	1.5	1/10	115	24-7/8"	30"	39-3/8"
FDD-36-N	1	1	2	2	1.5	1/10	115	36-3/4"	29"	36-7/8"
FDD-59-N	2	2	3	3	3.0	1/3	115	59-1/2"	29"	36-7/8"
FDD-69-N	2	2	3	3	3.0	1/3	115	69-1/2"	29"	36-7/8"
FDD-79-N	3	2	4	4	3.0	1/3	115	80"	29"	36-7/8"
FDD-95-N	3	2	4	5	3.0	1/3	115	95-1/2"	29"	36-7/8"
STAINLESS STEEL DIRECT DRAW										
FDD-24S-N	1	1	1	1	1.5	1/10	115	24-7/8"	30"	39-3/8"
FDD-36S-N	1	1	2	2	1.5	1/10	115	36-3/4"	29"	36-7/8"
FDD-59S-N	2	2	3	3	3.0	1/3	115	59-1/2"	29"	36-7/8"
FDD-69S-N	2	2	3	3	3.0	1/3	115	69-1/2"	29"	36-7/8"
FDD-79S-N	3	2	4	4	3.0	1/3	115	80"	29"	36-7/8"
FDD-95S-N	3	2	4	5	3.0	1/3	115	95-1/2"	29"	36-7/8"


*Height does not include towers. (G) Glass door units.



Black vinyl exterior finish or full Stainless Steel.




Stainless-steel interior.




Sturdy stainless steel floor.



Fully front breathing for seamless fit in any space.



Complete side-mount refrigeration system.



Ecomate (GWP) (ODP) insulation, 2" thick.



Eco-friendly R-290 Hydrocarbon refrigerant, meets DOE's Energy Conservation standards.



Meets the NSF-7 standards for food safety.



Please visit
fagorcommercial.com
for complete specifications.



Direct Draw Beer Coolers

FDD Slim Line Series



FDD-24-48



FDD-24-60S



FDD-24-72

MODEL	DOORS	TOWERS	TAPS	KEGS	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
BLACK VINYL SLIM LINE DIRECT DRAW										
FDD-24-48	2	1	2	2	2.0	1/4	115	49-5/8"	24"	35-1/2"
FDD-24-60	2	2	3	3	2.0	1/4	115	62-1/4"	24"	35-1/2"
FDD-24-72	2	2	3	3	2.0	1/4	115	72"	24"	35-1/2"
STAINLESS STEEL SLIM LINE DIRECT DRAW										
FDD-24-48S	2	1	2	2	2.0	1/4	115	49-5/8"	24"	35-1/2"
FDD-24-60S	2	2	3	3	2.0	1/4	115	62-1/4"	24"	35-1/2"
FDD-24-72S	2	2	3	3	2.0	1/4	115	72"	24"	35-1/2"


*Height does not include towers. (S) Stainless steel units / (G) Glass door units.



Black vinyl exterior finish or full Stainless Steel.




Stainless-steel interior.




Sturdy stainless steel floor.



Fully front breathing for seamless fit in any space.



Complete side-mount refrigeration system.



Ecomate (GWP) (ODP) insulation, 2" thick.



Eco-friendly R-290 Hydrocarbon refrigerant, meets DOE's Energy Conservation standards.



Meets the NSF-7 standards for food safety.



Please visit
fagorcommercial.com
for complete specifications.





FBC-50



FBC-79S



FBC-79

MODEL	DOORS	DIVIDERS	CAPACITY		AMPS	HP	VOLTAGE	Width	DIMENSIONS	Height
			(12 oz cans)	(12 oz bottles)					Depth	
BLACK VINYL BOTTLE COOLERS										
FBC-50	2	3	510	280	2.0	1/4	115	50-1/2"	26-3/8"	33-3/8"
FBC-65	2	4	690	370	2.0	1/4	115	65-1/2"	26-3/8"	33-3/8"
FBC-79	3	7	850	470	2.0	1/4	115	80"	26-3/8"	33-3/8"
FBC-95	3	7	1050	575	2.0	1/4	115	95"	26-3/8"	33-3/8"
STAINLESS STEEL BOTTLE COOLERS										
FBC-50S	2	3	510	280	2.0	1/4	115	50-1/2"	26-3/8"	33-3/8"
FBC-65S	2	4	690	370	2.0	1/4	115	65-1/2"	26-3/8"	33-3/8"
FBC-79S	3	7	850	470	2.0	1/4	115	80"	26-3/8"	33-3/8"
FBC-95S	3	7	1050	575	2.0	1/4	115	95"	26-3/8"	33-3/8"


*Depth does not include cap catcher. (S) Stainless steel units / (G) Glass door units.



Black vinyl exterior finish or full Stainless Steel.




Sturdy stainless steel floor.




Complete side-mount refrigeration system.



Heavy duty adjustable bin dividers, epoxy coated.



LED interior lights for shadow-free illumination.



Ecomate (GWP) (ODP) insulation, 2" thick.



Eco-friendly R-290 Hydrocarbon refrigerant, meets DOE's Energy Conservation standards.



Meets the NSF-7 standards for food safety.



Please visit
fagorcommercial.com
for complete specifications.



Glass Frosters / Chillers

FGF Series



FGF-24



FGF-36S



FGF-50

MODEL	DOORS	CAPACITY		AMPS	HP	VOLTAGE	DIMENSIONS		
		10 oz Mugs	25 oz Mugs				Width	Depth	Height
BLACK VINYL GLASS FROSTER									
FGF-24	1	96	43	1.5	1/3	115	24-5/8"	26-7/8"	35-3/4"
FGF-36	1	162	80	1.5	1/3	115	36-5/8"	26-7/8"	35-3/4"
FGF-50	2	231	120	2.5	1/2	115	49-5/8"	26-7/8"	35-3/4"
STAINLESS STEEL GLASS FROSTER									
FGF-24S	1	96	43	1.5	1/3	115	24-5/8"	26-7/8"	35-3/4"
FGF-36S	1	162	80	1.5	1/3	115	36-5/8"	26-7/8"	35-3/4"
FGF-50S	2	231	120	2.5	1/2	115	49-5/8"	26-7/8"	35-3/4"


(S) Stainless steel units / (G) Glass door units.




Black vinyl exterior finish or full Stainless Steel.



Sturdy stainless steel floor.



Complete side-mount refrigeration system.



Ecomate (GWP) (ODP) insulation, 2" thick.



Eco-friendly R-290 Hydrocarbon refrigerant, meets DOE's Energy Conservation standards.



Meets the NSF-7 standards for food safety.



Please visit
fagorcommercial.com
for complete specifications.





CPR-60-4



CPR-4



CPR-8

MODEL	CAPACITY GN	Qty.	AMPS	HP	VOLTAGE	Width	DIMENSIONS Depth	Height
REFRIGERATED COUNTERTOP RAILS								
CPR-60-4	GN-1/6	4	2.5	1/6	115	15-3/4"	26-1/8"	11-1/4"
CPR-4	GN-1/7	4	2.5	1/6	115	28-1/8"	26-1/8"	11-1/4"
CPR-8	GN-1/8	8	2.5	1/6	115	28-1/8"	16"	10"

* Height does not include 1" for bumper. ** All specifications are subject to change without notice.



All stainless steel interior and exterior construction.



Coved corner floor for a clean and safe food environment.




CPR-60-4: top surface with mirror stainless steel finish and full color display.



Units come standard with clear polycarbonate 1/6 size pans with lids.



Units maintain 33° F to 41° F in the pans at all times.



High density CFC-free polyurethane insulation.



R-134A eco-friendly refrigerant.



Meets the NSF-7 standards for food safety.




Please visit
fagorcommercial.com
for complete specifications.



ONNERA US products come from six manufacturing plants, in five different countries from three continents. This global manufacturing footprint enables us to provide a locally-adapted product offering that meets customer demands across every geographic destination.

Our market approach is also locally everywhere, with proactive, hands-on local sales teams in all global markets; Europe, Asia-Pacific, Middle East and the Americas.

- Manufactured in North America
- 20 years in the US market.
- Nationwide service network.
- Private label capabilities.
- Refrigeration and cooking products.
- Stock of products and parts for quick delivery.

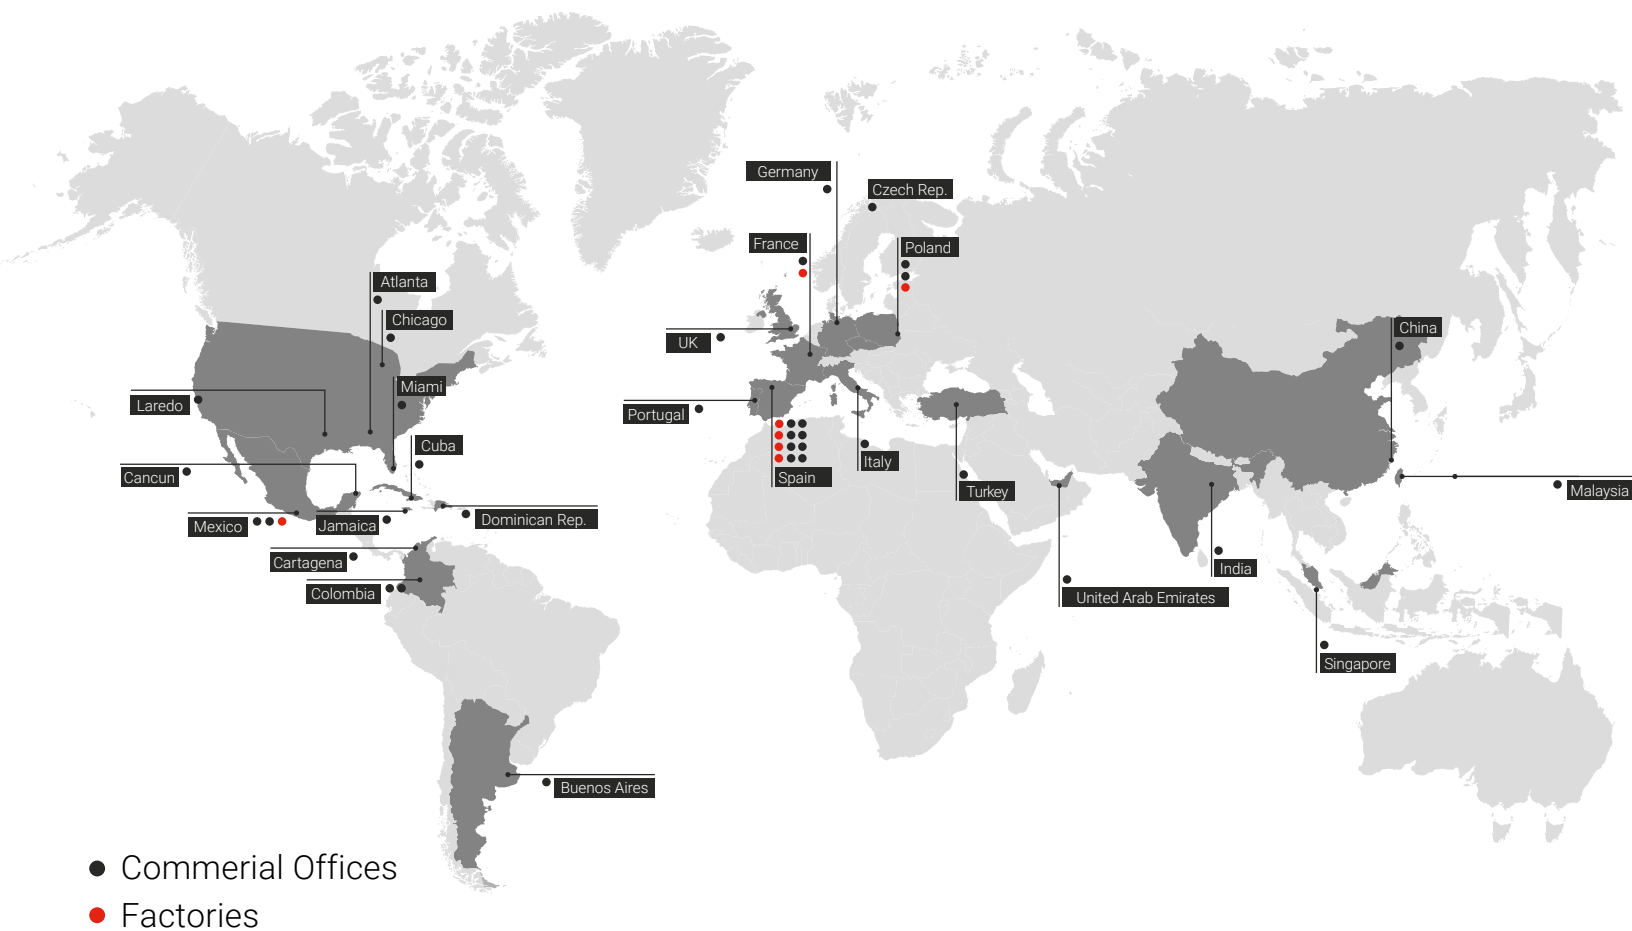



ONNERA USA

13105 NW 47th Avenue

Opa Locka FL 33054

T. (305) 779 0170

TF. (866) 463 2467

E-mail: us.sales@onneragroup.com

ONNERA GROUP

